



Smart technology, smart products.

PRODUCT CATALOGUE





BOSTIK, SMART ADHESIVES.

Bostik is a leading, global adhesive specialist in multiple markets. With the new brand, Bostik Smart Adhesives, we enhance our common identity with global consistency.

“Smart Adhesives” reflects our positioning on developing intelligent and innovative adhesive solutions that are more functional and efficient.

THE GECKO – INSPIRATIONAL ADHESION.

For centuries, scientists have been intrigued by geckos that have evolved one of the most effective adhesives known to man. They can cling to almost any surface, run up polished glass at a meter per second and easily support their entire body weight with a single toe.

The Bostik gecko is flexible, adaptive, open-minded and bold. It symbolizes Bostik’s smart adhesive solutions that meet market challenges to create new business opportunities in future adhesives.

Contents

STATIONERY & DIY ADHESIVES	
Blu-Tack	4
Blu Stik	4
Glu Stik	4
HG3 Hot Melt Sticks & Gun	5
Mini Hot Melt Sticks & Gun	5
Hobby Craft	5
Kids PVA	5
No More Nails Blister	6
Gel Contact	6
General Purpose Silicone	6
Titan Bond Plus	6
Contact Bond	7
Multi Bond	7
Super Glue Blister	7
Ultragrip Stud Adhesive	7
Epoxy Control - 2 Hours (Syringe)	8
Epoxy Control - 2 Hours (Tube)	8
Epoxy Rapid Metal - 5 Minutes (Tube)	8
Epoxy Power - 80 Seconds (Syringe)	8
Epoxy Rapid - 5 Minutes (Syringe)	9
Epoxy Rapid - 5 Minutes (Tube)	9
Epoxy Express - 90 Seconds (Syringe)	9
ADHESIVES & SILICONES	
No More Nails Construction Adhesive	10
No Nails Instant Water Based Adhesive	10
Multipurpose Silicone Sealant	10
Xtreme Fix	11
Xtreme Seal & Fix	11
Gap Seal	11
PVC Pipe Cement Type N	12
PVC Pipe Cement Type P	12
PVC Priming Fluid	13
Roof & Gutter Premium Silicone	14

Kitchen & Bathroom Acetic Cure	15
Kitchen & Bathroom Neutral Cure	15
Fill A Gap Flexible	15
Primesil	16
6S Neutral Cure	17
POLYURETHANE SEALANTS	
Seal N Flex 1 Polyurethane	18
Seal N Flex FC Polyurethane	19
PU Construction Polyurethane	19
FIRE & ACOUSTIC RATED	
Fireban One	20
Firecaulk	20
FILLERS	
Expanda Foam	21
Bog	21
Fire Rated Expanda Foam	21
Fire Rated Expanda Foam Gun Grade	22
Expanda Foam Gun & Foam Cleaner	22
Expanda Designer Gun	22
FLOOR LEVELLING	
UL-50	24
UL-100	24
UL-200	24
UL-Ultrafine	25
UL-Screed	25
UL-RapidSet	25
CONSTRUCTION GROUTS	
Flowfill Grout GP	26
Flowfill Grout UW	26
Flowfill Panel Grout	26

Contents

Techflow Grout HS	27
Techflow LA Grout	27
Techflow Grout GP	27
Techflow Grout HES	28
Patchfix Structural HB	28
Patchfix Fine Render	28
Patchfix Concrete	29
HARD FLOORING	
GreenForce™	30
Ultraset SingleStep2™	30
Ultraset HP	30
Ultraset SF	31
Ultraset S	31
Ultraset DX	31
Timberaset	32
Simple-Fix	32
WATERPROOFING	
Moisture Seal	34
Ultraseal Vapour Barrier	34
Dampfix Gold	34
Dampfix PU	35
Dampfix Bandage	35
Dampfix 3	35
Primeseal Rapid	36
Primeseal Immersed Rapid	36
TILING	
Mastik	36
Asaflex	38
Excelflex	38
Megafix	38
Megalastic	39
Ultra Mastik	39

Superglue	39
Superfixall	40
Multifix	40
Conflex	40
Maxiflex	41
Fixall	41
Prontofix	41
Sanded Grout	42
Designer Grout	42
PRIMERS AND CLEANERS	
UL-Primer	44
Specialist Primer	44
Multiprime	44
N40	45
N49	45
Handy Wipes	45
APPLICATION TOOLS	
Application Pro Cartridge Gun	46
Applicator Catridge Gun (625SAE)	46
Application Barrel Gun Clear 37cm	46
Trade Quality Gun	46
Application End Cap Sausage Gun	47
TG-4 Hot Glue Gun	47
Ultraset DX Flat V Notch Trowel	47
Application Nozzle Opaque 39mm	47
PLANOGRAM GUIDE	
Adhesive & Silicones - 550mm Bay	50
Adhesive & Silicones - 900mm Bay	52
Flooring Range - 900mm Bay	56
Flooring Range - 1,200mm Bay	58
Tiling Range - 900mm Bay	62
Tiling Range - 1,200mm Bay	64

BLU-TACK

Bostik Blu-Tack is a permanently plastic, reusable multi purpose adhesive. Excellent adhesive qualities. Very pliable. Non-toxic, safe for all the family.

RECOMMENDED USES

- Blu-Tack is recommended for use on non-porous surfaces such as vinyl coated wallpapers, painted surfaces, glass, metal etc.
- Blu-Tack has a myriad of uses around the home, school, factory or workshop

SAP No.	Size	Colour	Pkt Size	APN No
30840350	75gm	Blue/Grey	10	9310492000459

BLU STIK

Bostik Blu Stik is a smooth solid general purpose stationery adhesive. A smooth blue stick that goes on blue, dries clear so you know where you have applied the glue. Non wrinkle, convenient, mess free. Non-toxic – safe for all the family.

RECOMMENDED USES

- Designed to bond paper, cardboard and fabrics
- Ideal for scrap books, cut and paste activities, school projects, paper craft and dry mounting photographs

SAP No.	Size	Colour	Pkt	APN No
30840737	35gm Tray	Blue	10	9310492306155
30840064	35gm Blister Card	Blue	10	9310492006833
30840427	35gm x 2 Blister Card	Blue	10	9310492250120
30840114	35gm x 5 Multi Pack	Blue	3	9310492316154
30840738	21gm Tray	Blue	10	9310492306773
30840113	21gm x 5 Multi Pack	Blue	5	9310492316772
30840224	21gm x 2 Blister Card	Blue	6	9310492250649
30840739	8gm Tray	Blue	20	9310492303345
30840323	8gm x 3 Blister Card	Blue	10	9310492254371
30840210	8gm x 2 Blister Card	Blue	10	9310492250113

GLU STIK

Bostik Glu Stik is a smooth solid stick general purpose stationery adhesive. A smooth glue stick that dries clear. Non wrinkle, convenient, mess free. Non-toxic. Safe for all the family.

RECOMMENDED USES

- Designed to bond paper, carboard and fabrics
- Ideal for scrap books, cut and paste activities, school projects, paper craft and dry mounting photographs

SAP No.	Size	Colour	Pkt Size	APN No
30840734	35gm Tray	White	10	9310492006154
30840095	35gm x 5 Multi Pack	White	3	9310492016153
30840427	35gm x 2 Blister Card	White	10	9310492250120
30840063	35gm Blister Card	White	10	9310492006826
30840736	21gm Tray	White	10	9310492006772
30840094	21gm x 5 Multi Pack	White	5	9310492016771
30840226	21gm x 2 Blister Card	White	6	9310492250830
30840735	8gm Tray	White	20	9310492060055
30840362	8gm x 3 Blister Card	White	10	9310492256566
30840251	8gm x 2 Blister Card	White	10	9310492255118



HG3 HOT MELT GUN & STICKS

Bostik HG3 Hot Melt Gun & Sticks are made of a general purpose translucent flexible hot melt in a stick form for use with the Bostik HG3 Glue Guns.

Bostik HG3 Glue Sticks in conjunction with a Bostik HG3 Glue Gun, provide an instant, fast, clean and versatile bond between a myriad of household and craft materials.

RECOMMENDED USES

- The HG3 Glue Sticks are ideal for lightweight DIY, hobby, craft work, home decor projects and for minor household repairs.
- In conjunction with Bostik HG3 Glue Gun, provide an instant bond for most craft and household materials including, fabric, wood , leather, most plastics, polystyrene and ceramics

SAP No.	Size	Colour	Pkt Size	APN No
30840107	HG3 Glue Sticks (12mm x 95mm)	Clear	10	9310492000800
30803695	Gun	N/A	12	9310492001654



MINI HOT MELT GUN & STICKS

Bostik Mini Hot Melt Gun & Sticks are a light weight easy to use trigger action glue gun for dispensing hot melt glue.

RECOMMENDED USES

- Adheres to most craft and household materials

SAP No.	Size	Colour	Pkt Size	APN No
30803735	7.2mm x 100mm	Clear	10	9310492080031
30803736	Gun	N/A	4	9310492080017



HOBBY CRAFT

Bostik Hobby Craft PVA Glue is a versatile water based PVA emulsion designed as a multi purpose glue which will give strong and lasting bond to a variety of surfaces. This adhesive sticks most porous and semi porous materials such as paper, carboard, wood, fabric, leather/suede, felt, sequins, styrene, foam, concrete or terracotta.

RECOMMENDED USES

- Intended for home and school and is ideal for decoupage and craft projects using a variety of materials that could be affected by solvent based adhesives

SAP No.	Size	Colour	Pkt Size	APN No
30803744	100ml	White	6	9310492001203



KIDS PVA

Bostik Kids PVA is a versatile water based PVA emulsion designed as a multi purpose glue which will give a strong and lasting bond to a variety of porous and semi-porous materials

RECOMMENDED USES

- Bostik Kids PVA is ideal for models, masks and other craft work

SAP No.	Size	Colour	Pkt Size	APN No
30803753	37ml	White	12	9310492254784
30803754	236ml	White	12	9310492254777
30840137	5L	White	4	9310492910291



NO MORE NAILS BLISTER

Bostik No More Nails is a construction adhesive with strong bond and high initial grab which remains flexible. Designed to eliminate much of the nailing required with wood.

RECOMMENDED USES

- Designed to eliminate much of the nailing required with wood, flooring panels, particle board and cement sheeting.

SAP No.	Size	Colour	Pkt Size	APN No
30804572	75gm Tube	Straw	6	9310492002736

GEL CONTACT

Bostik Gel Contact Bond is a specially designed solvent based adhesive which will not drip or spill. Gel Contact Bond has a high bond strength which increases on ageing and has excellent resistance to heat and water. It is especially suited to vertical surfaces.

RECOMMENDED USES

- Bostik Gel Contact Bond will bond wood, leather, cork, etc. to a variety of surfaces such as metal particle board and masonite

SAP No.	Size	Colour	Pkt	APN No
30840181	500ml	Yellow	10	9310492443140
30840182	1L	Yellow	10	9310492443157
30840183	4L	Yellow	4	9310492443164

GENERAL PURPOSE SILICONE

Bostik General Purpose Silicone is an industrial grade, neutral cure silicone sealant designed for sealing lap joints in metal guttering, aluminium roofing, flashings and down pipes. Specifically designed to meet Australian conditions.

RECOMMENDED USES

- General purpose adhering & sealing, building materials, steel, aluminium, concrete, brick and masonry
- Block and brickwork
- Metal roofing systems
- Flashing & down pipes
- Lap joints in Zinalume, Colorbond® and other BHP decorative sheet metal
- Skylights & extraction units
- Pipe or sprinkler system penetrations
- Air conditioning

SAP No.	Size	Colour	Pkt	APN No
30804562	75gm Tube	Clear	6	9310492002477

TITAN BOND PLUS

Bostik Titan Bond Plus is a two component high performance, solvent-free epoxy adhesive that dries to an off-white colour. It has unique properties that displace water then bonds to material.

RECOMMENDED USES

- Bostik Titan Bond Plus bonds to ABS, PVC, acrylic, steel, galvanised metal, aluminium, ceramics, concrete, copper, glass, fibreglass, wood and plastic composites

SAP No.	Size	Colour	Pkt Size	APN No
30804543	24ml	Resin - Off White Hardener- Trans	10	9310492005959



CONTACT BOND

Bostik Contact Bond is a solvent based, high solids, brush or scraper grade contact adhesive. It is primarily used in the furniture and allied industries for fixing plastic laminates and rigid or flexible decorative surface coverings to wood, MDF, particle board, plywood, leather and metal.

RECOMMENDED USES

- Fixing plastic laminates and rigid or flexible decorative surface coverings to wood, MDF, particleboard & plywood
- Bonding most natural and neoprene rubbers as well as wide variety of porous and non porous surfaces.

SAP No.	Size	Colour	Pkt Size	APN No
30840014	500ml	Pale Yellow	10	9310492003504
30840015	1L	Pale Yellow	10	9310492003559
30840016	4L	Pale Yellow	4	9310492003658

MULTI BOND

Bostik Multi Bond is a general purpose, solvent based, nitrile rubber adhesive. It is nearly clear in colour and will give excellent bond that is both chemical and temperature resistant. It is packaged in a convenient aluminium tube for ease use.

RECOMMENDED USES

- It has many household and industrial uses and is particularly suitable in bonding leather, metals, wood, canvas PVC and other plastics. It is widely used in the repair of toys, leather goods, furniture, upholstery, jewellery and in the handcraft making areas.

SAP No.	Size	Colour	Pkt Size	APN No
30804535	30ml tubes	Clear	6	9310492001104

SUPER GLUE BLISTER

Bostik Super Glue Blister is a multi purpose glue that bonds most non porous materials in seconds. It dries to a clear, permanent bond with exceptional tensile strength up to 210Kg per square cm.

RECOMMENDED USES

- May be used as an instant adhesive by the DIY person
- Excellent for precision work such as ; electrical, optical, watch and jewellery

SAP No.	Size	Colour	Pkt Size	APN No
30804556	3ml Blister	Clear	6	9310492001708
30804549	3ml x 2 Blister	Clear	10	9310492251493

ULTRAGRIP STUD ADHESIVE

Bostik Ultragrip Stud Adhesive is a specially formulated non-toxic, high strength acrylic stud adhesive designed to minimize nail and screw "popping" caused by timber shrinkage or frame movement if applied in accordance with AS 2589-1983.

RECOMMENDED USES

- To fix plasterboard to steel or timber studs and frames (in conjunction with nails & screws)
- Filling irregular gaps between plasterboard and frame
- Bonding timber floors to timber
- Bonding timber to concrete or metal
- Bonding chipboard, plywood, masonite and Hardie-Flex shetting to joints or solid floors/walls

SAP No.	Size	Colour	Pkt Size	APN No
30606231	5.2kg	Pink	1	9310492123615
30804611	850gm	Pink	20	9310492023618



EPOXY CONTROL – 2 HOURS (SYRINGE)

Bostik Epoxy Control 2 Hours Syringe is a solvent free, low odour, two-part, repositionable epoxy adhesive. It is oil resistant and when dry they can be sanded and painted if required.

RECOMMENDED USES

- Bonds to a wide range of materials including metal, wood, masonry, ceramics, glass, leather, rubber, chipboard, concrete, cardboard, fabric and most plastics.

N.B. Product won't work on polyolefins such as polythene or polypropylene.

SAP No.	Size	Colour	Pkt Size	APN No
30840364	1 x 25ml Syringe	Resin – Pale Yellow Hardener –Pale Yellow	6	9310492257341



EPOXY CONTROL – 2 HOURS (TUBE)

Bostik Epoxy Control 2 Hours Tubes are solvent free, low odour, two-part, repositionable epoxy adhesive. It is oil resistant and when dry they can be sanded and painted if required.

RECOMMENDED USES

- Bonds to a wide range of materials including metal, wood, masonry, ceramics, glass, leather, rubber, chipboard, concrete, cardboard, fabric and most plastics.

N.B. Product won't work on polyolefins such as polythene or polypropylene.

SAP No.	Size	Colour	Pkt Size	APN No
30840409	2 x 15ml Tube	Resin – Pale Yellow Hardener –Pale Yellow	6	931049225300



EPOXY RAPID METAL – 5 MINUTES (TUBE)

Bostik Epoxy Rapid Metal 5 Minutes Tubes are solvent free, low odour, two part, epoxy metal adhesive. It is oil resistant and when dry they can be sanded and painted if required.

RECOMMENDED USES

- Bonds to a wide range of materials including metal, wood, masonry, ceramics, glass, leather, rubber, chipboard, concrete, cardboard, fabric and most plastics.

N.B. Product won't work on polyolefins such as polythene or polypropylene.

SAP No.	Size	Colour	Pkt Size	APN No
30840366	2 x 15ml Tubes	Resin – Metallic Black Hardener – White	6	9310492257365



EPOXY POWER – 80 SECONDS (SYRINGE)

Bostik Epoxy Power 80 Seconds Syringe is a solvent free, low odour, two-part, ultra strong epoxy adhesive. Bostik Epoxy Power has an incredibly strong, easy to use, one shot adhesive. It is also solvent-free, heat, water and oil resistant, and when dry it can be sanded and painted.

RECOMMENDED USES

- Bonds to a wide range of materials including metal, wood, masonry, ceramics, glass, leather, rubber, chipboard, concrete, cardboard, fabric and most plastics.

N.B. Product won't work on polyolefins such as polythene or polypropylene.

SAP No.	Size	Colour	Pkt	APN No
30840367	3gm Syringe	Resin – Pale Yellow Hardener –Pale Yellow	6	9310492257372



EPOXY RAPID – 5 MINUTES (SYRINGE)

Bostik Epoxy Rapid 5 Minute Syringe is a solvent free, low odour, two-part, rapid curing epoxy adhesive. It is also heat, water and oil resistant and when dry they can be sanded and painted if required.

RECOMMENDED USES

- Bonds to a wide range of materials including metal, wood, masonry, ceramics, glass, leather, rubber, chipboard, concrete, cardboard, fabric and most plastics.

N.B. Product won't work on polyolefins such as polythene or polypropylene.

SAP No.	Size	Colour	Pkt Size	APN No
30840369	1 x 25ml Syringe	Resin – Pale Yellow Hardener –Pale Yellow	6	9310492257396



EPOXY RAPID – 5 MINUTES (TUBE)

Bostik Epoxy Rapid 5 Minutes Tubes are a solvent free, low odour, two-part rapid curing epoxy adhesive. It is also heat, water and oil resistant and when dry they can be sanded and painted if required.

RECOMMENDED USES

- Bonds to a wide range of materials including metal, wood, masonry, ceramics, glass, leather, rubber, chipboard, concrete, cardboard, fabric and most plastics.

N.B. Product won't work on polyolefins such as polythene or polypropylene.

SAP No.	Size	Colour	Pkt Size	APN No
30840365	2 x 15ml Tubes	Resin – Pale Yellow Hardener –Pale Yellow	6	9310492257358



EPOXY EXPRESS – 90 SECONDS (SYRINGE)

Bostik Epoxy Express 90 Seconds Syringe is a solvent free, low odour, two-part, ultra strong epoxy adhesive. It is also solvent-free, heat, water and oil resistant, and when dry they can be sanded and painted if required.

RECOMMENDED USES

- Bonds to a wide range of materials including metal, wood, masonry, ceramics, glass, leather, rubber, chipboard, concrete, cardboard, fabric and most plastics.

N.B. Product won't work on polyolefins such as polythene or polypropylene.

SAP No.	Size	Colour	Pkt Size	APN No
30840368	1 x 25ml Syringe	Resin – Pale Yellow Hardener –Pale Yellow	6	9310492257389



NO MORE NAILS CONSTRUCTION ADHESIVE

Bostik No More Nails is a general purpose construction adhesive suitable for bonding a wide variety of building materials. Its superb bond strength is ideal for demanding situations.

RECOMMENDED USES

- As a contact adhesive for installation of wall and floor panels, timber, particle board, plasterboard, MDF, structural flooring panels, masonry, aluminium, polystyrene, galvanised iron, steel, metal, glass, concrete and cement sheeting



SAP No.	Size	Colour	Pkt Size	APN No
30607006	320gm	Straw	15	9310492256283
30607924	600ml	Straw	20	9310492260891

NO NAILS INSTANT WATER BASED ADHESIVE

Bostik No Nails Instant is a premium, fast acting multi-purpose construction adhesive that creates a high strength bond, eliminating the need for nails and screws in many decorating, refurbishment, building and DIY applications. Being water based, Bostik No Nails Instant has very low odour. It is safe, easy to use and environmentally friendly.

RECOMMENDED USES

- General purpose, high strength instant grab construction adhesive
- Suitable for polystyrene, wall panels, architraves, ceramic tiles, metal, aluminium, glass, some plastics, cementitious and plaster sheets, metal studs, brick, masonry and concrete walls



SAP No.	Size	Colour	Pkt Size	APN No
30840354	420gm	Straw	12	9310492256290

MULTIPURPOSE SILICONE SEALANT

Bostik Multipurpose Silicone Sealant is ideal for exterior use, creating flexible, waterproof and weather resistant seals around your home. It can also be used for interior applications.

RECOMMENDED USES

- Most exterior and interior sealing applications such as sealing of skylights and building materials (concrete, brick, masonry, aluminium and steel)



SAP No.	Size	Colour	Pkt	APN No
30840363	300ml	Translucent	12	9310492257181
30840355	300ml	White	12	9310492256313

XTREME FIX

Bostik Xtreme Fix is a high performance construction adhesive that grabs instantly to most surfaces. It is suitable for any small or big jobs on hand.

RECOMMENDED USES

- Bonds:
- Concrete
 - Timber
 - Metal
 - Polystyrene
 - Damp & underwater surfaces

SAP No.	Size	Colour	Pkt Size	APN No
30601957	290ml	White	12	9310492256108



XTREME SEAL & FIX

Bostik Xtreme Seal & Fix is a high performance, flexible sealant and high strength grab adhesive in one. It cures to form a permanent, flexible seal and tough bond.

RECOMMENDED USES

- Seal & Fix:
- Gutters & downpipes
 - Metal & wood
 - Glass & ceramics
 - Concrete & plaster
 - Roof tiles
 - Rigid PVC

SAP No.	Size	Colour	Pkt Size	APN No
30601956	290ml	White	12	9310492256115
30821271	290ml	Clear	12	9310492257419



GAP SEAL

Bostik Gap Seal is a general purpose acrylic gap filler suitable for use on interior and exterior areas prior to painting.

RECOMMENDED USES

- Skirting boards, architraves & plasterboard
- Window and door frames
- For low movement joints, between light partition walls, filling cracks in plaster
- Brickwork, concrete, aluminium, wood & glass



SAP No.	Size	Colour	Pkt Size	APN No
30605381	450gm	white	20	9310492259833

PVC PIPE CEMENT TYPE N

NON PRESSURE

Bostik PVC Pipe Cement Type N is a specifically formulated welding cement for joining unplasticized PVC (PVC-U) pipes and fittings in non-pressure piping systems.

CLASSIFICATIONS

- Meets Australian & NZ standards AS/NZS 3879
- Suitable for use in contact with drinking water applications- meets AS/NZS 4020
- Low VOC

RECOMMENDED USES

- For bonding with PVC-U pipes & PVC-U fittings
- For bonding PVC-U pipes to ABS fittings only



SAP No.	Size	Colour	Pkt	APN No
30840488	125ml	Blue	18	9310492260365
30840463	250ml	Blue	18	9310492259970
30840464	500ml	Blue	18	9310492259987
30840465	1L	Blue	6	9310492259994
30840466	4L	Blue	4	9310492260006
30840491	250ml	Clear	18	9310492260396
30840467	500ml	Clear	18	9310492260013
30840493	4L	Clear	4	9310492260419

PVC PIPE CEMENT TYPE P

PRESSURE GRADE

Bostik PVC Pipe Cement Type P is a specifically formulated welding cement for joining unplasticised PVC (PVC-U) pipes and fittings in pressure piping systems.

CLASSIFICATIONS

- Meets Australian & NZ standards AS/NZS 3879
- Suitable for use in contact with drinking water applications-meets AS/NZS 4020
- Low VOC

RECOMMENDED USES

- For bonding with PVC-U & PVC-U fittings
- Suitable for pressure applications
- Suitable for use with drinking water



SAP No.	Size	Colour	Pkt	APN No
30840490	125ml	Green	18	9310492260389
30840474	250ml	Green	18	9310492260082
30840475	500ml	Green	18	9310492260099
30840492	500ml	Clear	18	9310492260402
30840495	4L	Clear	4	9310492260433

PVC PRIMING FLUID

Bostik PVC priming Fluid is a solvent based fluid formulated for the cleaning and priming of PVC pipes and fittings prior to the application of PVC pipe solvent cements.

CLASSIFICATIONS




- Meets Australian & NZ standards AS/NZS 3879
- Suitable for use in contact with drinking water applications meets AS/NZS 4020
- WaterMark certified as per the Plumbing Code of Australia
- Low VOC



RECOMMENDED USES

- For bonding with PVC-U & ABS fittings
- Use with Type N or Type P cement
- Suitable for use with drinking water

SAP No.	Size	Colour	Pkt Size	APN No
30840489	125ml	Red	18	9310492260372
30840469	250ml	Red	18	9310492260037
30840470	500ml	Red	18	9310492260044
30840471	1L	Red	6	9310492260051
30840472	4L	Red	4	9310492260068
30840473	500ml	Clear	18	9310492260075
30840494	4L	Clear	4	9310492260426

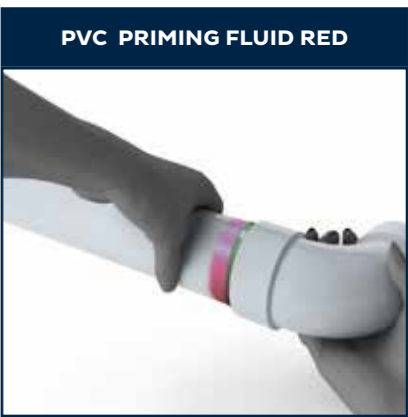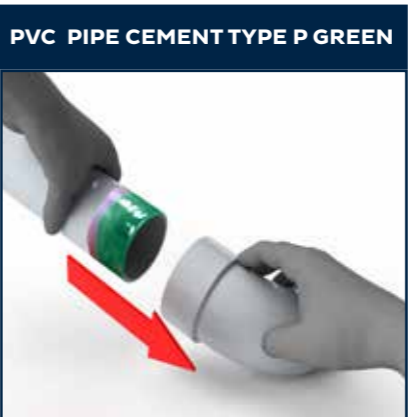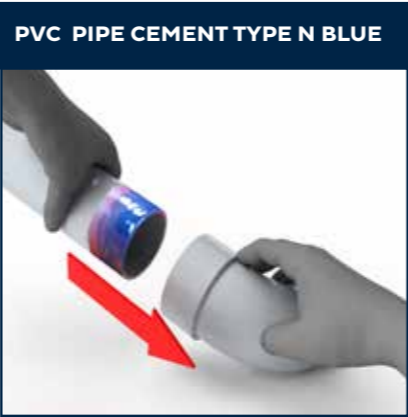

Before commencing joining procedure ensure all Personal Protective Equipment (PPE) is worn according to the Material Safety Data Sheet (MSDS) and follow all safety instructions marked on the bottle. When joining, the joining procedure should be followed to AS/NZS 3879 ensuring the pipe has been cut square and deburred. Use the Bostik applicators to wipe joints to be bonded, ensuring that the surfaces have been wiped thoroughly and deglossed prior to fitting. When using Bostik Red Priming Fluid a noticeable pink stain will remain where pipes are fitted.

ROOF & GUTTER PREMIUM SILICONE

NEUTRAL CURE

Bostik Roof & Gutter premium silicone is a one component, mid modulus, neutral curing 100% silicone which provides excellent adhesion to many common substrates.

CLASSIFICATIONS


- Translucent and Grey are suitable for drinking water as per Australian standards AS/NZS 4020 and meet ATS 5200.014:2004 standards

RECOMMENDED USES

- Plumbing roofing applications
- Metal roofing systems
- Metal water tanks
- Spouting / flashing and down pipes
- Lap joints in Zinalume, Colorbond® and other decorative sheet metal
- Skylights and metal and PVC flues and extraction units
- Pipe or sprinkler system penetrations
- Air conditioning ducting and sheet-metal fabrications
- General purpose adhesive and sealant for building materials such as steel, aluminium, glass, concrete, brick, ceramic, terracotta roof tiles



SAP No.	Size	Colour	Pkt Size	APN No
30800828	300ml	Translucent	20	9310492002552
30840059	300ml	White	20	9310492012568
30840060	300ml	Grey	20	9310492012575
30840061	300ml	Black	20	9310492012582
30840238	615gm	Grey	20	9310492251233
30804566	615gm	Translucent	20	9310492251226
30840232	300ml	Surf Mist®	6	9310492996899
30840335	300ml	Classic Cream™	6	9310492251035
30840233	300ml	Cottage Green®	6	9310492996844
30840234	300ml	Manor Red®	6	9310492996851
30840235	300ml	Woodland Grey®	6	9310492996882
30840450	300ml	Evening Haze	6	9310492259925
30840448	300ml	Monument®	6	9310492259901
30840449	300ml	Basalt®	6	9310492259918

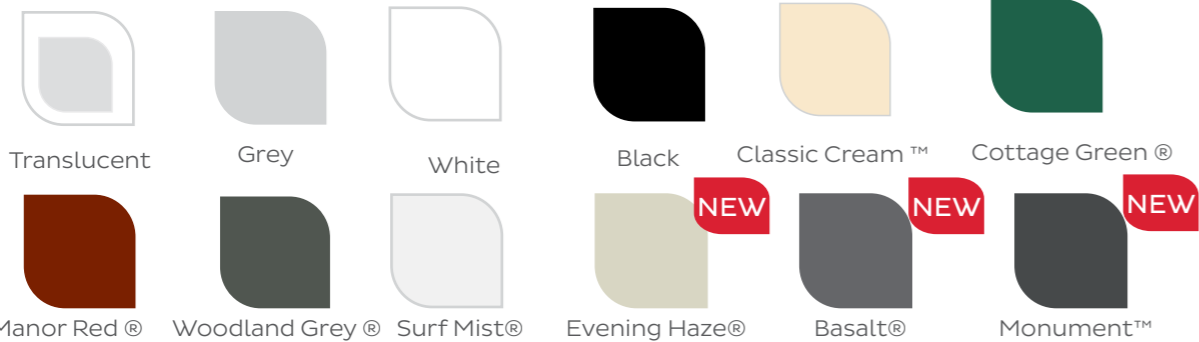

The colours on this chart have been matched as closely as possible to actual silicone colours and should be used as a guide only. ™Colour name is a trademark of BlueScope Steel Australia. ® Colorbond and Colour name is a registered trademark of BlueScope Steel Australia.

KITCHEN & BATHROOM PREMIUM SILICONE

ACETIC CURE

Bostik Kitchen & Bathroom Premium Silicone is an acetic (acetoxo) curing sealant. It is specially formulated to resist mildew when exposed to prolonged hot and humid environments.

RECOMMENDED USES

- Sealing in wet areas
- Bathtubs and showers
- Glass to Glass screens
- Ceramic Tile
- Most laminated surfaces
- Fibre glass
- Rimless sinks
- Bathroom and Kitchen fixtures
- Toilet pans. (note: not to be used on marble, granite or stone)



SAP No.	Size	Colour	Pkt Size	APN No
30818135	300ml	Translucent	20	9310492996905
30804571	300ml	White	20	9310492002408

KITCHEN & BATHROOM PREMIUM SILICONE

NEUTRAL CURE

Bostik Kitchen & Bathroom Premium Silicone is a neutral (oxime) curing silicone that resists mildew in hot and humid environment.

RECOMMENDED USES

- Seals around bath tubs, shower stalls, wall fixtures, rimless sinks
- Kitchen and bathroom fixtures
- May be used for ceramic tile grouting and is suitable for galvanised zinc coated steel or concrete surfaces

SAP No.	Size	Colour	Pkt Size	APN No
30840127	300ml	Translucent	20	9310492209630
30840077	300ml	White	20	9310492202563



FILL A GAP FLEXIBLE

Bostik Fill A Gap Flexible is a highly flexible, anti-fungal, mildew resistant acrylic gap sealant. It offers excellent adhesion strength when cured and is more flexible than conventional acrylic gap sealant with minimal shrinkage.

RECOMMENDED USES

- Anti-fungal and anti-mould formulation
- Highly flexibly (+/- 10% joint movement)
- Non slump
- Easy colour match in 7 popular colours
- Cured sealant will dry to a similar colour as when set
- Smooth finish with low shrinkage
- Water clean up
- Good adhesion to most building materials
- Interior/exterior applications
- Environmentally friendly, Low VOC

SAP No.	Size	Colour	Pkt Size	APN No
30607683	300ml	Vanilla	12	9310492256252
30607681	300ml	White	12	9310492256269
30607684	300ml	Beige	12	9310492256207
30607682	300ml	Light Grey	12	9310492256245
30607685	300ml	Dark Grey	12	9310492256238
30607687	300ml	Black	12	9310492256214
30607686	300ml	Chocolate Brown	12	9310492256221




PRIMESIL

Bostik Primesil Designer Silicone is a single component, elastic, acetic cure silicone for indoor and outdoor use. This sanitary and tile silicone has a maximum movemeny tolerance of ±12.5%.

RECOMMENDED USES

- For sealing joints and connecting joints in glass, window and metal construction and in the sanitary sector
- Bathrooms, kitchens and laundries
- Not recommended for use with marble/natural stone, PE, PP and PET

SAP No.	Size	Colour	Pkt Size	APN No
30840633	300ml	210 Antique White	6	9310492261348
30840634	300ml	410 Silver Gris	6	9310492261355
30840635	300ml	100 White	6	9310492261362
30840636	300ml	420 QLD	6	9310492261379
30840637	300ml	440 Delorian Grey	6	9310492261386
30840638	300ml	810 Pewter	6	9310492261393
30840639	300ml	820 Charcoal	6	9310492261409
30840640	300ml	220 Moleskin	6	9310492261416
30840641	300ml	230 Tuscan	6	9310492261423
30840642	300ml	510 Travertine	6	9310492261430
30840643	300ml	430 Grey	6	9310492261447
30840644	300ml	610 Sandstone	6	9310492261454
30840645	300ml	540 Espresso	6	9310492261461
30840646	300ml	710 Heritage Grey	6	9310492261478

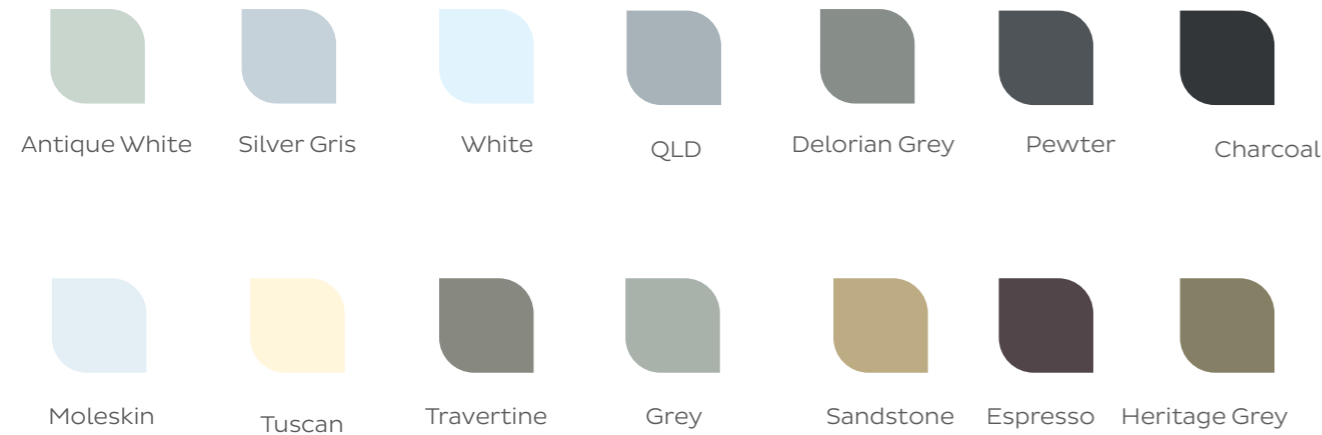

The colours on this chart have been matched as closely as possible to actual silicone colours and should be used as a guide only.

6S NEUTRAL CURE

Bostik 6S is a one component, non-flowing, NEUTRAL cure, mid modulus silicone sealant It cures by absorption of atmospheric moisture to form a flexible and durable elastomeric sealant.

RECOMMENDED USES

- Bathrooms, fibreglass spa units, shower screens, ceramic tiles
- Tiles and grout areas. (for Granite, Marble and some porous stones, use refer to Bostik 5CLM data sheet)
- Around edges of kitchen bench tops
- Edges of splash backs (*Not to be used on the back of splash backs)
- Cool Rooms

SAP No.	Size	Colour	Pkt Size	APN No
30840572	300ml	Almond Ivory	15	9310492251950
30840256	300ml	Antique White	15	9310492252032
30840223	300ml	Ceramic Ivory	15	9310492251967
30804633	300ml	Charcoal	15	9310492252018
30840222	300ml	Gloss White	15	9310492251936
30804631	300ml	Mid Grey	15	9310492251974
30804626	300ml	Pewter	15	9310492252001
30804627	300ml	Sandstone	15	9310492251981
30804628	300ml	Silver Ash	15	9310492252025
30840257	300ml	Taupe	15	9310492252049
30840212	300ml	Titanium	15	9310492251943
30840227	300ml	Beige Sand	15	9310492251998
30840574	300ml	Matt White	15	9310492251929
30840573	300ml	Translucent	15	9310492251912




The colours on this chart have been matched as closely as possible to actual silicone colours and should be used as a guide only.

SEAL N FLEX 1 POLYURETHANE

Bostik Seal N Flex 1 is a low modulus, one component and Class A polyurethane sealant. When cured it will form a tough, flexible seal capable, of cyclic expansion and compression movement of 100% (±50%) of the original installed joint width. Bostik Seal N Flex 1 is resistant to normal weathering conditions such as rain, sunlight, snow, steel, ozone, atmospheric contamination and pollution. Its excellent weatherability enables it to retain its original properties after years of exposure, CSIRO RILEM LONG TERM SEALANT DURABILITY STUDY DBCE Doc.97/196 (M).

RECOMMENDED USES

- Insitu concrete and render
- Precast and tilt up panels
- Brickwork & blockwork
- Plasterboard face and paper lined recessed edges
- Fibre cement sheet
- Aluminium windows
- Granite, sandstone and marble
- GRC, fibreglass & most specialty panel systems

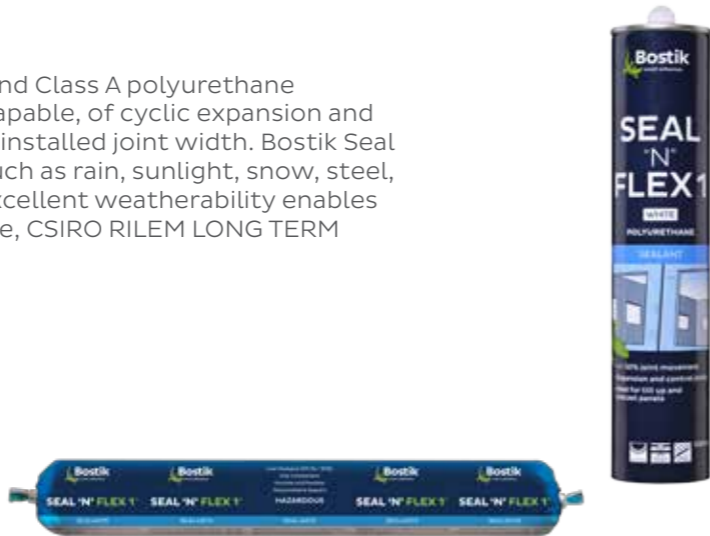

SAP No.	Size	Colour	Pkt Size	APN No
30803243	300ml	Grey	20	9310492000831
30804581	300ml	Black	20	9310492000855
30840067	300ml	White	20	9310492000848
30840034	600ml	Grey	20	9310492131702
30840037	600ml	Limestone	20	9310492131665
30840036	600ml	Black	20	9310492131672
30840033	600ml	White	20	9310492131696
30800511	600ml	Bahama Beige	20	9310492131689
30840046	600ml	Sandstone	20	9310492131658
30800964	600ml	Redwood	20	9310492100708
30800963	600ml	Off White	20	9310492100869
30840052	600ml	Manilla Sand	20	9310492100715
30604591	600ml	Classic Bone	20	9310492100739
30800959	600ml	Eppng Grey	20	9310492100722
30840047	600ml	Bronze	20	931492100807




The colours on this chart have been matched as closely as possible to actual sealant colours and should be used as a guide only.

SEAL N FLEX FC POLYURETHANE

Bostik Seal N Flex FC is a high performance fast cure one component polyurethane sealant. When cured it will form a tough, flexible seal bond capable of cyclic, expansion and compression movement. Joints or fabrications formed with this sealant can be expected to expand and compress a total of 50% (±25%) of original joint dimensions to ASTM C719.

RECOMMENDED USES

- For sealing floor joints
- High bond strength
- A medium / high modulus product, which forms a resilient and permanently elastic seal
- Excellent adhesion to most materials including metals, concrete, brick, wood, plasterboard, GRC & CFC
- Paintable (refer to technical data sheet)
- Non-slumping
- Resistant to fungal attack to AS1157.2
- Potable water approval to AS4020
- Excellent resistance against hydrolysis, ageing and a wide range of chemicals
- One component, no mixing required
- High movement accommodation (±25%) ASTM C719

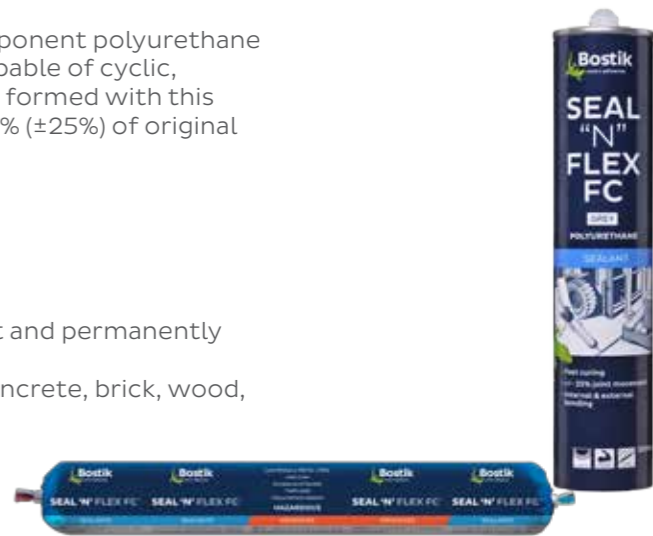

SAP No.	Size	Colour	Pkt Size	APN No
30840072	600ml	Grey	20	9310492020822
30803687	600ml	White	20	9310492020877
30800512	600ml	Black	20	9310492252643
30840076	300ml	White	20	9310492020846
30840075	300ml	Black	20	9310492020853
30840073	300ml	Grey	20	9310492131924

PU CONSTRUCTION POLYURETHANE

Bostik PU Construction is a general purpose, one component, polyurethane construction sealant. When cured it will form a tough, flexible seal capable of cyclic expansion and compression movement of 50% (+ 25%) of the original installed joint width.

RECOMMENDED USES

- Insitu concrete
- Precast and tilt up panels
- Brickwork & block work



SAP No.	Size	Colour	Pkt Size	APN No
30840035	600ml	Grey	20	9310492257242

FIREBAN ONE

Bostik Fireban One is a fire rated intumescent, low modulus, one component, and Class A polyurethane sealant. When cured it will form a tough, flexible fire rated seal capable of cyclic expansion and compression movement of 50% ($\pm 25\%$) of the original installed joint width. Bostik Fireban One is resistant to normal weathering conditions such as rain, sunlight, snow, sleet, ozone, atmospheric contamination and pollution, its excellent weatherability enables it to retain its original properties after years of exposure.

RECOMMENDED USES

Fire & Acoustic Rated Sealing of Joints in:

- Insitu concrete floors and walls
- Precast and tilt up panels
- Brickwork and blockwork
- Rendered masonry
- Plasterboard (Fire rated & Acoustic Rated)
- Fibre cement sheet (Fire Rated & Acoustic Rated)



SAP No.	Size	Colour	Pkt	APN No
30840044	600ml	Limestone	20	9310492131887

FIRECAULK

Bostik Firecaulk is a single component, non-sag, fire rated acrylic based gunnable sealant. A general purpose product for construction joints and the sealing of service penetrations in plasterboard, concrete floors and masonry wall constructions. Bostik Firecaulk is a gun grade acrylic based sealing compound specifically manufactured for sealing low movement interior joints (less than 5%) in masonry and plasterboard to provide a fire barrier for periods up to 4 hours.

RECOMMENDED USES

- Sealing of gaps around pipes, cables, ducts and services which penetrate fire rated walls and floors
- Fire rated cable penetrations in concrete and masonry
- Installation of fire rated sealant in concrete walls and floors
- For vertical and horizontal joints
- Application requiring acoustic properties or STC rating
- Sealing construction and expansion joints
- Sealing joints in pre-cast panels
- Perimeter sealing of door and window framing
- Sealing gaps between facade and cladding panels to various building materials
- For new construction and remedial applications
- To prevent the spread of fire and smoke through walls and floors



SAP No.	Size	Colour	Pkt Size	APN No
30840066	300ml	White	20	9310492132105
30801129	600ml	Limestone	20	9310492002538
30840044	870gm	Limestone	20	9310492131887
30840317	600ml	Grey	20	9310492256832
30840056	10L	Limestone	1	9310492022550

EXPANDA FOAM

Bostik Expanda Foam is a one component, multi purpose polyurethane foam that will not shrink and cures to an airtight, moisture resistant seal. The straw adapter included with each can aids in easy application, especially to fill gaps of all dimensions in the most difficult locations.

RECOMMENDED USES

- Bostik Expanda Foam is a great insulator against heat and cold. It greatly reduces noise, dust and draughts, and blocks access by rodents
- The foam has powerful adhesive properties, bonding well to timber, brick, concrete, galvanised steel, aluminium, glass fibre cement sheet and plasterboard

SAP No.	Size	Colour	Pkt Size	APN No
30804545	350gm	Beige	12	9310492005850
30840126	580gm	Beige	12	9310492005867



BOG

Bostik Bog is a two part unsaturated flexible polyester resin based filler and adhesive for trades people, builders and the handy-person. Depending on temperature, the filler and hardener blend has a working (gel) time of 3 to 8 minutes. Bostik Bog can be sanded, cut or chiselled after 15 to 20 minutes. After 30 minutes the filled area can be primed with an oil based or quality acrylic primer and top coated with most types of quality paint.

RECOMMENDED USES

- Fills timber, architraves, window frames, sashes, skirting boards, furniture, steel, fibreglass, fibre cement, masonry and tiles permanently without dismantling or replacement

SAP No.	Size	Colour	Pkt Size	APN No
30804596	500gm	Off White	6	9310492040431
30804595	1Kg	Off White	6	9310492443188



FIRE RATED EXPANDA FOAM

Bostik Fire Rated Expanda Foam is a one component, self expanding, ready to use polyurethane foam. It will not shrink and cures to an airtight, moisture resistant seal. The straw adapter included aids in easy application, especially to fill gaps of all dimensions in the most difficult locations.

CLASSIFICATIONS

- Bostik Fire Rated Expanda Foam meets criteria for B1 - AS1530.4-2005 and AS 4072.

RECOMMENDED USES

- Fire retardant installation of window and door frames
- Fire and smoke retardant sealing of connection between partition walls, ceilings and floors
- Filling of cavities
- All applications where fire retardant characteristics are required

SAP No.	Size	Colour	Pkt Size	APN No
30840484	750ml	Light Red	12	9310492260327



FIRE RATED EXPANDA FOAM GUN GRADE

Bostik Fire Rated Expanda Foam Gun Grade is a one component, self expanding, ready to use professional gun applied polyurethane foam. It will not shrink and cures to an airtight, moisture resistant seal.

CLASSIFICATIONS

- Bostik Fire Rated Expanda Foam meets criteria for B1 foam –AS1530.4–2005 and AS 4072.

RECOMMENDED USES

- Fire retardant installation of window and door frames
- Fire and smoke retardant sealing of connections between partition wall, ceilings and floors
- Filling of cavities
- All applications where fire retardant characteristics are required



SAP No.	Size	Colour	Pkt Size	APN No
30840485	750ml	Light Red	12	9310492260334

EXPANDA FOAM GUN & FOAM CLEANER

Bostik Expanda Gun & Foam Cleaner is a ready to use cleaning fluid for use on Bostik Expanda Guns & Foams.

RECOMMENDED USES

- Cleans Expanda Foam Dispenser Guns
- Cleans valves and spray nozzles of manual Expanda Foam Aerosol can
- Removes uncured foam



SAP No.	Size	Colour	Pkt Size	APN No
30840487	500ml	Clear	12	9310492260358

EXPANDA DESIGNER GUN

High quality gun for professional use.

RECOMMENDED USES

- For use on Bostik Fire Rated Expanda Gun Foams



SAP No.	Size	Colour	Pkt Size	APN No
30840486	N/A	N/A	1	9310492260341



UL 50

Bostik UL 50 is a general purpose tile and carpet underlay. A self-levelling, single component cementitious underlay formulated to achieve a smooth flat surface with ease of application.

APPLICATION

Application thickness of 2mm – 15mm.

RECOMMENDED USES

- General purpose tile or carpet underlay
- Residential and commercial
- New construction and refurbishment projects
- Internal

SAP No.	Size	Colour	Pkt Size	APN No
30840422	20Kg	Grey	1	9310492258737

UL 100

Bostik UL 00 ia a superior tile & carpet underlay. A rapid hardening, self-levelling single component, cementitious underlay formulated to achieve maximum flow without any shrinkage or cracking. Results in a smooth level surface with ease of application.

APPLICATION

Application thickness feather edge 25mm.

RECOMMENDED USES

- Superior underlayment for carpet and ceramic tiles (maybe used under parquet, timber & vinyl after extended curing)
- Fast repairs of uneven concrete floors
- Residential, commercial and medium industrial application
- New construction and refurbishment
- Internal

SAP No.	Size	Colour	Pkt Size	APN No
30840423	20Kg	Grey	1	9310492258744

UL 200

Bostik UL 200 is a superior vinyl & timber underlay. A rapid hardening, polymer modified, cementitious underlay formulated for maximum flow without shrinkage or cracking.


APPLICATION

Application thickness feather edge 25mm.

RECOMMENDED USES

- Superior underlayment for vinyl & timber floor covering (may be used under carpet & tile if quick covering time is required)
- Reinstatement of new or exisiting concrete floors subject to foot traffic
- Industrial equipment, and forklift traffic or trolleys
- Residential, commercial and industrial applications
- Heavy industrial traffic
- Wet areas (not immersed)
- With under subfloor heating

SAP No.	Size	Colour	Pkt	APN No
30605416	20Kg	Grey	1	9310492258751

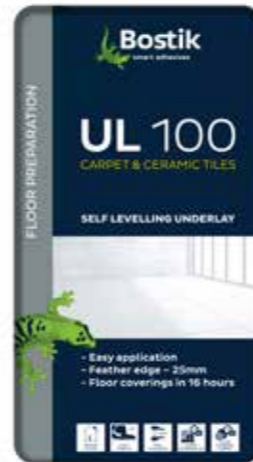

UL ULTRAFINE

Bostik UL Ultrafine is a superior cementitious feathering compound. A fast setting, shrinkage compensated compound, designed to provide a true feather edge transition.

APPLICATION

Application thickness feather edge – 6mm.

RECOMMENDED USES

- Smoothing out scratched, cracks and ridges in floor underlayments
- Filling gouges and joints to feather finish over concrete, wood and exisiting ceramic, terrazzo and quarry tiles

SAP No.	Size	Colour	Pkt Size	APN No
30840428	10Kg	Grey	1	9310492258768

UL SCREED

Bostik UL Screed is a fast setting, high build modified cementitious underlay; specially formulated for quick and easy application to achieve required falls without any shrinkage or cracking.

APPLICATION

Application thickness :

15 – 200mm Bonded

25 – 200mm Unbonded

RECOMMENDED USES

- External balconies or in ramp applications
- Wet areas where controlled falls are required
- Onto concrete and FC (Cement Sheet) sheet substrate
- Residential, commercial or medium industrial applications
- As a system in conjunction with Bostik/ASA wet area internal waterproofing, membranes

SAP No.	Size	Colour	Pkt Size	APN No
30605691	20Kg	Grey	1	9310492258775

UL RAPIDSET

Bostik UL RapidSet a fast setting, high strength, polymer modified, shrinkage compensated floor repair mortar, ideal for most horizontal and vertical repairs.


APPLICATION

Application thickness : 5mm – 120mm

RECOMMENDED USES

- Heavy duty floor underlayment repairs
- Floor repairs requiring reinstatement of area in short time periods
- Building up ramp areas prior to application of floor coverings
- Residential, commercial and medium industrial application
- New construction and refurbishment projects

SAP No.	Size	Colour	Pkt Size	APN No
30840437	20Kg	Grey	1	9310492131177

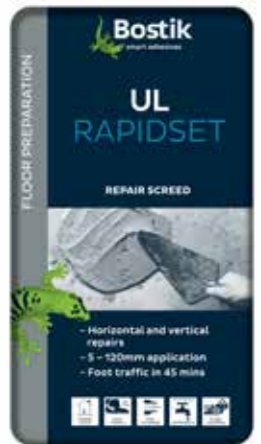

FLOWFILL GROUT GP

Bostik Flowfill Grout GP is a Class A, flowable repair grout with controlled expansion designed for use with concrete. Expansion in the plastic state helps compensate for shrinkage and settlement. Contains Portland cement, graded aggregate and specialised additives.

RECOMMENDED USES

- General purpose grouting
- Precast and pre stressed panels
- Grouting in column bases, base filling
- Filling core holes, rod holes and similar concrete defects
- Fill in grout for hollow block walls
- Joints between precast panels and other joints
- Tilt slab panels

SAP No.	Size	Colour	Pkt Size	APN No
30840122	20Kg	Grey	1	9310492250632
30840411	20Kg WA	Grey	1	9310492250632

FLOWFILL GROUT UW

Bostik Flowfill Grout UW is a purpose designed, non shrink (Class A) grout for underwater grouting applications. Bostik Flowfill Grout UW is used for free flow or pumped grouting applications underwater or in tidal zones.

RECOMMENDED USES

- Free flow or pumped applications
- Bridge columns
- Quarry pillars
- Concrete piling
- Shipways
- Dams
- Wharf columns

SAP No.	Size	Colour	Pkt Size	APN No
30840154	20Kg	Grey	1	9310492131719



FLOWFILL PANEL GROUT

Bostik Flowfill Panel Grout is a general purpose non-shrink (Class A) cementitious grout with enhanced working life, ideal for pre-cast and tilt-panel work.

RECOMMENDED USES

- All general purpose grouting
- Precast and prestressed panels
- Grouting in column based , base infilling
- Filling core holes, rod holes, rod holes and defects in concrete
- Fill in grout for hollow block walls
- Tilt slab panels

SAP No.	Size	Colour	Pkt Size	APN No
30840172	20Kg NSW	Grey	1	9310492131733

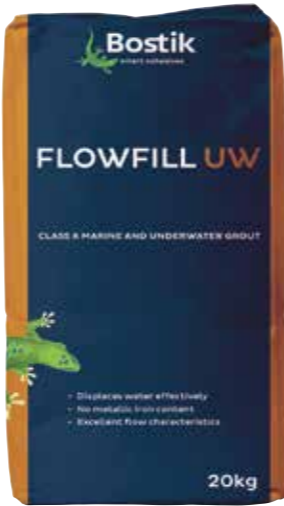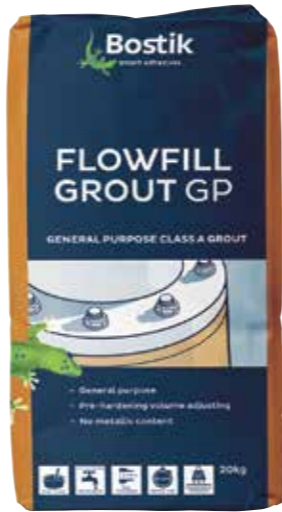

TECHFLOW GROUT HS

Bostik Techflow Grout HS is a high performance, high strength, non-rapid setting, non-shrink (Class C) cementitious grout.

RECOMMENDED USES

- Cementitious grouting where high strength is required
- Heavy duty support beneath machine base plates
- Bridge bearing and crane rails
- Anchoring bolts, bars and fittings
- Underpinning
- Applications subject to continuous vibrations and dynamic loads
- Critical equipment base plates

SAP No.	Size	Colour	Pkt Size	APN No
30840124	20Kg	Grey	1	9310492551012

TECHFLOW LA GROUT

Bostik Techflow LA Grout is a high performance, high flow (Class C) cementitious grout designed for large application thickness.

RECOMMENDED USES

- Cementitious grouting where high flow, high flow, high application thickness is required
- Heavy duty support beneath machine base plates
- Bridge bearing and crane rails
- Anchoring bolts, bars and fittings
- Underpinning
- Applications subject to continuous vibrations and dynamic loads
- Precision grouting application

SAP No.	Size	Colour	Pkt Size	APN No
30840219	20Kg	Grey	1	931049225618

TECHFLOW GROUT GP

Bostik Techflow Grout GP is a high performance, non-shrink (Class C) cementitious grout.

RECOMMENDED USES

- All general performance grouting
- Critical equipment base plates
- Heavy duty support beneath machine base plate
- Anchoring bolts, bars and fittings
- Underpinning
- Bridge bearing and crane rails
- Applications subject to continuous vibrations and dynamic loads

SAP No.	Size	Colour	Pkt Size	APN No
30840156	20Kg	Grey	1	9310492131726



TECHFLOW GROUT HES

Bostik Techflow Grout HES is a high performance, high strength, rapid setting non-shrink (Class C) cementitious grout.

RECOMMENDED USES

- Cementitious grouting where particular application requires rapid setting
- Critical equipment base plates
- Heavy duty support beneath machine base plates
- Bridge bearing and crane rails
- Anchoring bolts, bars and fittings
- Underpinning
- Applications subject to continuous vibrations and dynamic loads

SAP No.	Size	Colour	Pkt Size	APN No
30840123	20Kg	Grey	1	9310492551029

PATCHFIX STRUCTURAL HB

Bostik Patchfix Structural HB is a heavy-duty polymer modified high build structural repair reinstatement mortar with high ultimate compressive strength and abrasion resistance. The product is shrinkage compensated, which allows it to be used for vertical, horizontal and overhead application for large or small repairs.

RECOMMENDED USES

- Patching and repairing damaged concrete
- Structural repairs in horizontal, vertical and overhead
- Surfaces subject to low high bearing
- Terraces, balconies and facades
- Repairs where high compressive strength and abrasion resistance is required
- Repairs to spalled concrete caused by corrosion of steel reinforcement
- Repairs to damaged industrial flooring

SAP No.	Size	Colour	Pkt	APN No
30840149	20kg	Grey	1	9310492131511

PATCHFIX FINE RENDER

Bostik Patchfix Render Fine is a polymer modified fairing mortar for applications in thin layers. It produces a natural concrete grey appearance to concrete or masonry surfaces. It can be applied from feather edge up to a maximum thickness of 5mm. Bostik Patchfix Render Fine is shrinkage compensated and based on hydraulic binders, high-grade quartz sand and synthetic polymers.

RECOMMENDED USES

- Thin layer patching for vertical, horizontal and overhead applications
- Rendering over porous or damage concrete structures such as walls, water tanks, and sewerage and water treatment plants
- Levelling of uneven surfaces prior to coating
- Repairs where high compressive strength and abrasion resistance required
- Repairing honeycomb concrete, cracks and pinholes

SAP No.	Size	Colour	Pkt Size	APN No
30840155	20Kg	Grey	1	9310492131535



PATCHFIX CONCRETE

Bostik Patchfix Concrete is a high performance rapid setting, high early strength, shrinkage compensated repair concrete for patching concrete roadways, pavements and floors. Bostik Patchfix Concrete is a special blend of cement and aggregates supplied in a ready to use form. The addition of water and mixing produces a high strength, heavy-duty, trowellable repair concrete that minimises shut down time and allows the repairs back in service in 2-3 hours.

RECOMMENDED USES

- Repairing localised patches, small or large
- Repairing concrete roadways, warehouse floors, ramps, concrete pavements
- Maintenance repairs for areas 10mm to 180mm in depth in one layer
- Emergency repair of concrete
- Patching of worn or damaged concrete
- Concrete spalling repair
- Floor repairs and overlay
- Where minimum disruption to traffic and floor shutdown is required
- Floor areas subject to high abrasion and impact

SAP No.	Size	Colour	Pkt Size	APN No
30840150	20Kg	Grey	1	9310492131528



GREENFORCE™

GreenForce™ is a high performance adhesive and moisture control membrane all in one. Bostik's breakthrough AXIOS®™ Tri-Linking™ Polymer Technology used in this formulation maintains the superior long term durability and moisture protection properties of high end urethane adhesives.

RECOMMENDED USES

- Suitable for all engineered, solid, bamboo, cork and parquet hardwood flooring
- May be used over all properly prepared substartes common to hardwood flooring installations including concrete, plywood, well bonded vinyl and ceramic tile, cement backer board, gypsum underlayments, cement patch/underlayments, radiant-heat flooring and properly prepared terrazzo.



SAP No.	Size	Colour	Pkt Size	APN No
30608841	15.1L	Beige	1	747224700018

ULTRA-SET SINGLESTEP2™

Ultra-Set® SingleStep2™ is a high performance adhesive, moisture control, and sound reduction membrane all in one. Bostik's breakthrough AXIOS® Tri-Linking™ Polymer Technology used in this formulation maintains the superior long term durability, moisture control and sound abatement properties of high end urethane adhesives. Ultra-Set® SingleStep2™ contains Bostik's patent-pending Thickness Control™ Spacer Technology. This proprietary feature helps ensure proper membrane thickness is maintained between the hardwood flooring and substrate.

RECOMMENDED USES

- Provides a premium sound reduction barrier over the substarte that typically out performs ¼" thick cork underlayment
- High performance formulation may be used to adhere all engineered, solid, bamboo, cork and parquet hardwood flooring.



SAP No.	Size	Colour	Pkt Size	APN No
30608843	15.1L	Beige	1	747224700018

ULTRASET HP

Bostik Ultraset HP is a one part solvent and isocyanate free MS polymer based elastomeric adhesive formulated to adhere most types of wood, parquet, solid strip, engineered, bamboo and sheet timber flooring systems to flat concrete and timber subfloors, or over existing floors.

RECOMMENDED USES

- Adhering parquet, solid strip soft wood and hard wood flooring engineered flooring and bamboo flooring to concrete or timber subfloors
- Adhering recommended acoustic underlays as an intermediate layer between subfloor and flooring system



SAP No.	Size	Colour	Pkt Size	APN No
30840417	600ml	Brown	20	9310492258386
30840416	16Kg	Brown	1	9310492258379

ULTRASET SF

Bostik Ultraset SF is a one part solvent free, elastomeric polyurethane adhesive formulated to adhere most types of wood, parquet, solid strip, engineered, bamboo and sheet timber flooring systems to flat concrete and timber subfloors, or over existing floors.

RECOMMENDED USES

- Adhering parquet, solid strip, engineered and bamboo flooring to concrete or timber subfloors.
- Adhering recommended acoustic underlayments as an intermediate layer between subfloors and flooring systems



SAP No.	Size	Colour	Pkt Size	APN No
30840208	300ml	Brown	20	9310492250236
30840110	600ml	Brown	20	9310492131979
30604590	16Kg	Brown	1	9310492258324

ULTRASET S

Bostik Ultraset S is a one part solvent based polyurethane elastomeric adhesive formulated to adhere most types of wood, parquet, solid strip engineered, bamboo and sheet timber flooring systems to levelled concrete and timber substrates, or over exisiting timber floors.

RECOMMENDED USES

- Adhering parquetry to concrete or timber subfloors
- Adhering bamboo and prefinished flooring to concrete or timber subfloors
- Strip flooring to concrete or timber subfloors



SAP No.	Size	Colour	Pkt	APN No
30840483	600ml	Brown	20	9310492260310
30604073	16Kg	Brown	1	9310492258362

ULTRASET DX

Bostik Ultraset DX is a single pack, semi rigid, low foaming, quick setting, moisture cured polyurethane adhesive. When fully cured, the adhesive provides a very strong bond with excellent resistance to water and many chemicals. Ultraset DX is designed for bonding porous to porous or non-porous substrates.

RECOMMENDED USES

- An ideal high strength adhesive for bonding overlay or strip timber to concrete
- Bonding most types of timbers, strip flooring and sheet timber flooring systems to substrates such as concrete, particleboard, structural plywood, MDF cement sheeting



SAP No.	Size	Colour	Pkt Size	APN No
30840477	16Kg	Brown	1	9310492260112

TIMBERSET

Bostik Timberset is a high solids, water based, latex adhesive, that dries to form a strong bond between timbers. Bostik Timberset is specifically formulated for adhering parquetry, mosaic to timber substrates.

RECOMMENDED USES

- Mosaic
- Veneer
- Timber to timber adhesive
- Parquetry



SAP No.	Size	Colour	Pkt Size	APN No
30840425	16Kg	Brown	1	9310492258706

SIMPLE-FIX


Bostik Simple-Fix is a versatile, low viscosity, high performance, two-part epoxy adhesive used to repair hollow spots, replace floor boards and to install thresholds, mouldings and medallions. This adhesive is designed for use with engineered wood, parquet, solid wood and bamboo flooring designed and recommended in writing by the flooring manufactures for direct stick applications.

RECOMMENDED USES

- Versatile formulation works with engineered timber, parquet, solid timber and bamboo flooring
- Exceptional bond to wood and concrete



SAP No.	Size	Colour	Pkt Size	APN No
30840372	250ml	Yellow	6	747224351807

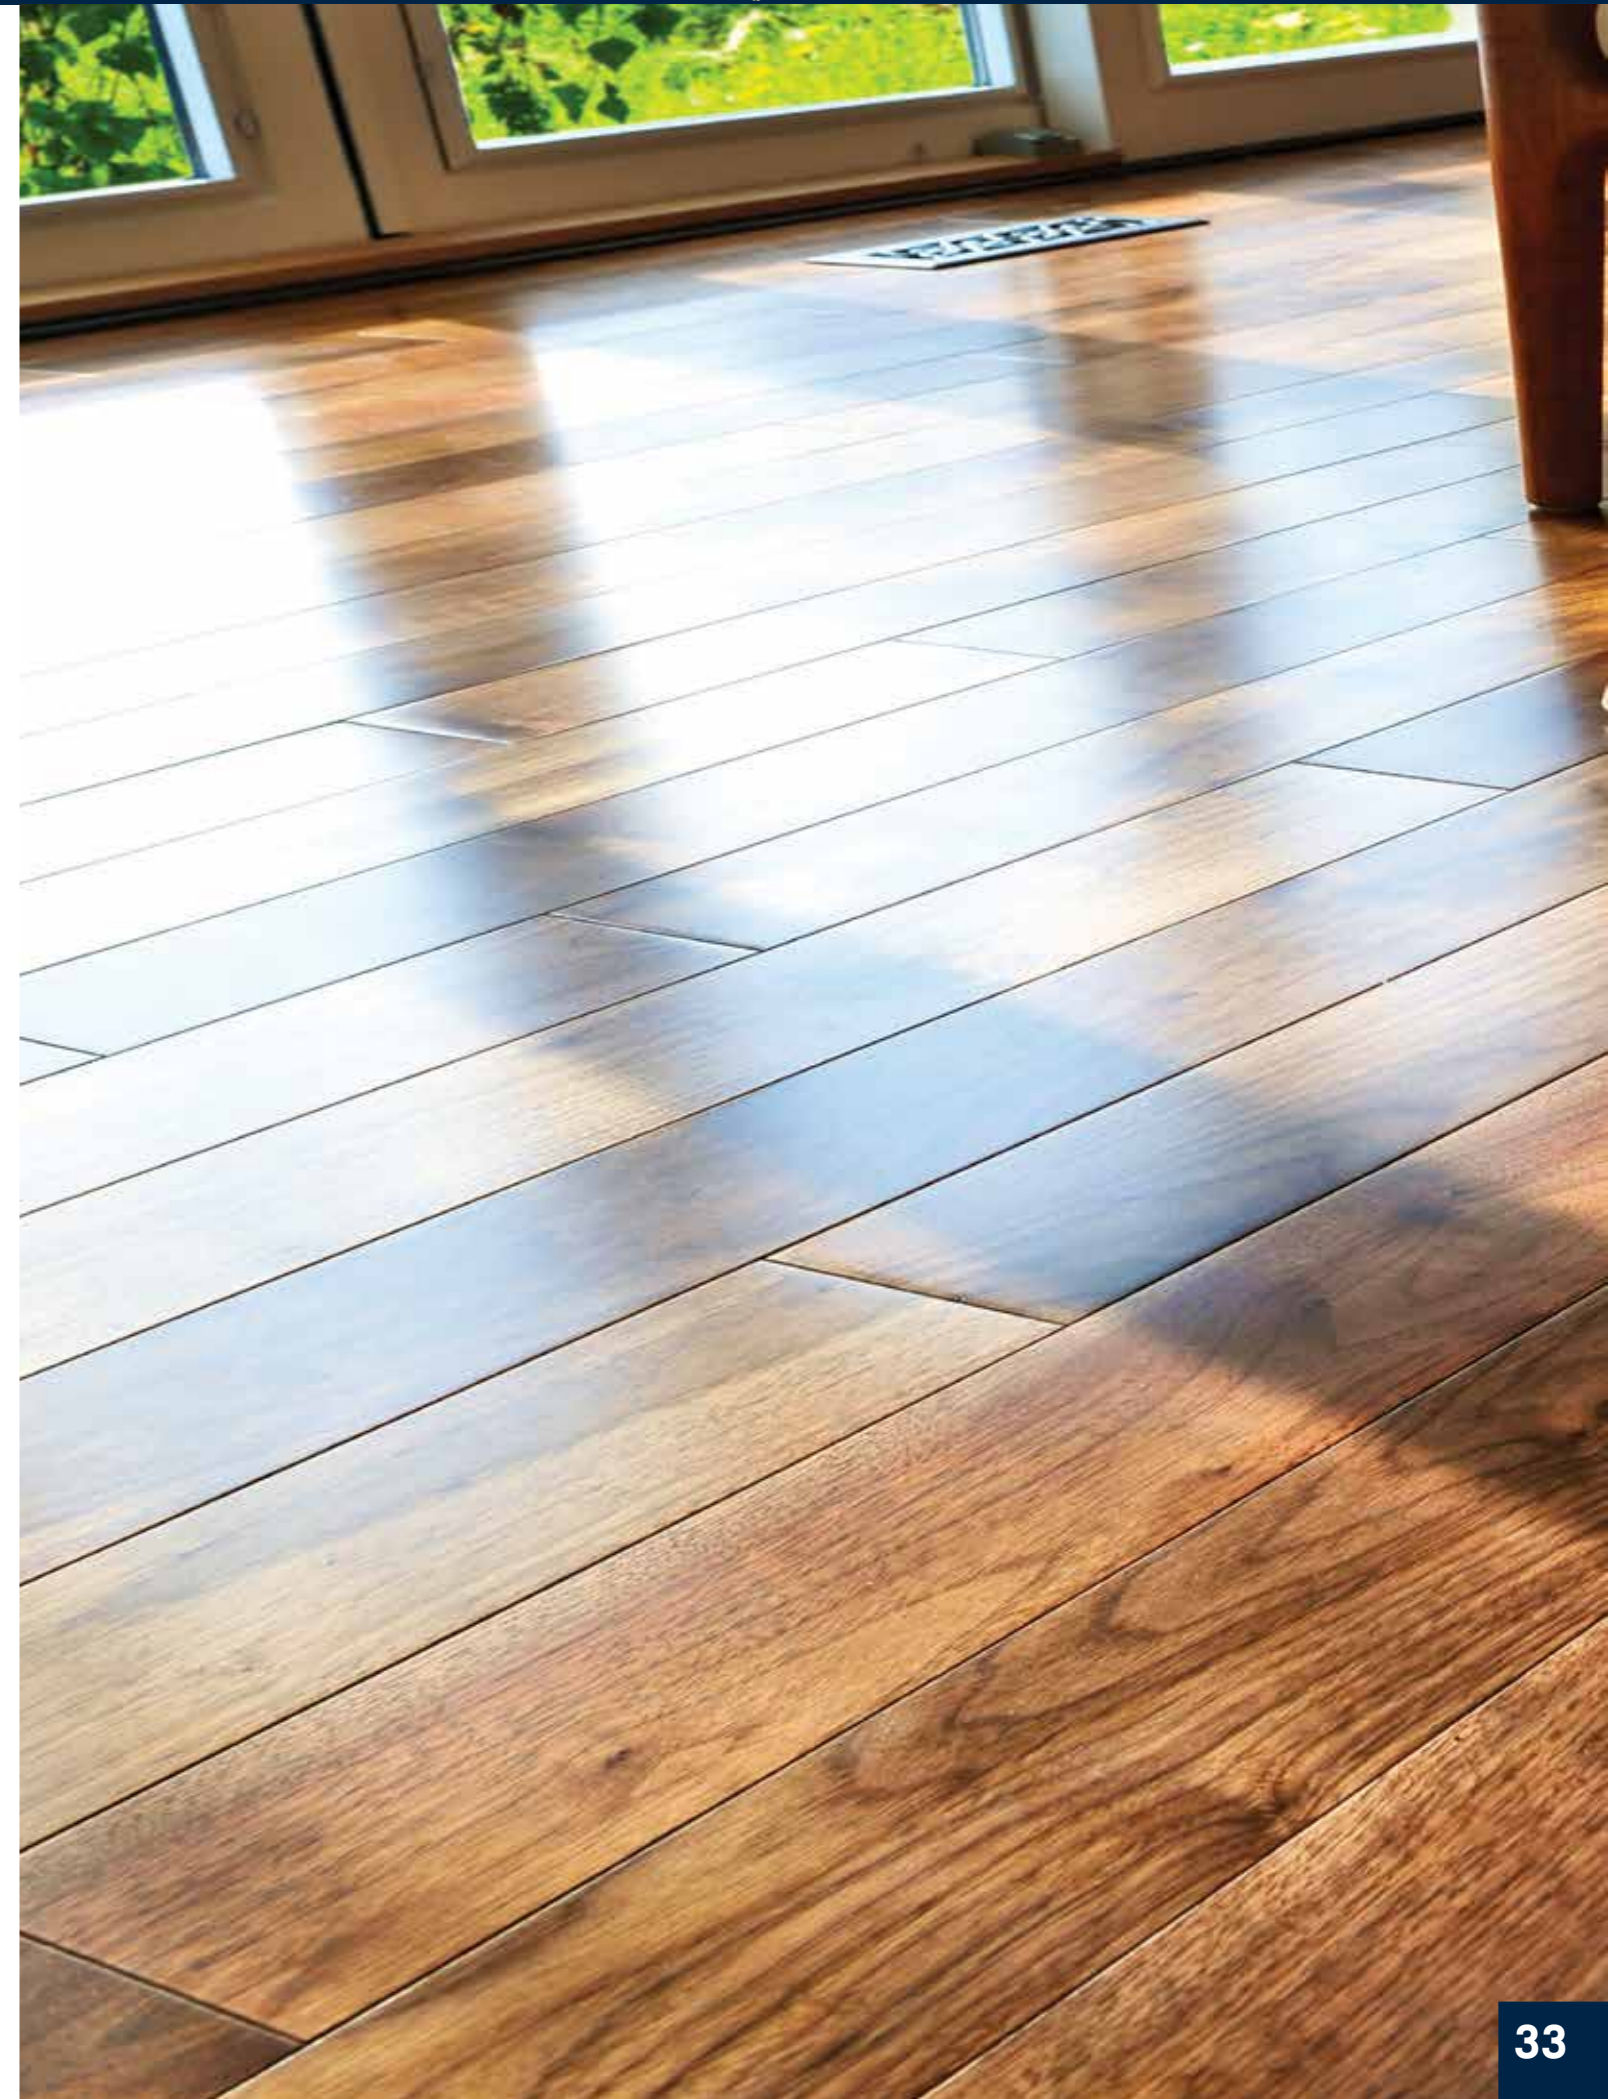

MOISTURE SEAL

Bostik Moisture Seal is a two part epoxy for priming under flooring adhesives and waterproofing membranes. An approved moisture vapour barrier suitable for direct contact with drinking water. The solvent free composition is compatible with a wide range of coverings including the Bostik Ultraset flooring adhesives and Dampfix waterproofing ranges.

RECOMMENDED USES

- Accepts a wide range of coverings
- Excellent bond to a range of substrates
- Concrete, structural plywood, fibre cement, metal, stone brick, masonry, AAC

SAP No.	Size	Colour	Pkt Size	APN No
30840500	10L Kit	Green	1	9310492260662



ULTRASEAL VAPOUR BARRIER

Bostik Ultraseal Vapour Barrier is a primer and vapour barrier/retardant to prevent moisture migration through a concrete slab to levels that will not cause swelling or cuping of timber floors

RECOMMENDED USES

- Suitable substrates; concrete, fibre cement, stone, masonry, structural plywood

SAP No.	Size	Colour	Pkt Size	APN No
30840434	4L Kit	Grey	1	9310492258805



DAMPFIX GOLD

Dampfix Gold is a urethane acrylic membrane for internal and external waterproofing.

RECOMMENDED USES

- As a waterproofing membrane to internal wet area shower, bathroom, kitchen, laundry & toilet areas
- As a waterproofing membrane to external balconies, rooftops & podium levels
- Suitable for concrete; cement rendered masonry; FC sheeting; water resistant plasterboard; and structural plywood

SAP No.	Size	Colour	Pkt Size	APN No
30804399	4L	Gold	4	9329431002904
30800489	15L	Gold	1	9329431002980



DAMPFIX PU

Dampfix PU polyurethane waterproofing membrane is specifically formulated for applications where the waterproofing membrane is to be covered by tiling systems laid on an unbonded reinforced screed to falls (ref: Guide to the Installation of Ceramic Tiles – AS3958.1).

RECOMMENDED USES

- As a waterproof membrane between the structural substrate & the reinforced unbonded tile screed in both internal & external applications
- As a waterproofing membrane to internal wet area shower, bathroom, kitchen, laundry & toilet areas
- As a waterproofing membrane to external balconies & podium levels
- Suitable for concrete; cement rendered masonry; FC sheeting; water resistant plasterboard; and structural plywood



DAMPFIX BANDAGE

Dampfix Bandage is a premium reinforcing tape designed to be used with Dampfix waterproofing membranes. It is a high performance bond breaker and joint isolation system. The prefabricated open weave material, strengthened with an elastomeric rubber reinforcing layer is designed to maximise elongation in critical areas.

RECOMMENDED USES

- Vertical and Horizontal joints and junctions
- On any substrate suitable for chosen Dampfix Membrane
- Sheet joints
- Compatible with all Dampfix membranes
- Static cracks in concrete slabs interior (AS3740) and exterior (AS4654)



SAP No.	Size	Colour	APN No
30840380	50m x 120mm Roll	Grey	9310492258669
30840378	25 units per box (Internal Corner)	Grey	9310492258676
30840379	25 units per box (External Corner)	Grey	9310492258690
30840381	25 units per box (Pipe Collar)	Grey	9310492258683

DAMPFIX 3

Dampfix 3 is a two-part, water based, acrylic modified cement, Class 2 waterproofing membrane system that meets the requirements of AS3740 by complying with AS/NZ 4858. This waterproofing membrane system is specifically formulated for application on graded substrates that provide positive falls to drainage outlets. Overlaying tiling systems must comply with Guide to the installation of Ceramic Tiles-AS3958.1

RECOMMENDED USES

- As a waterproofing membrane under tile to internal wet area shower, bathroom, kitchen, laundry & toilet areas when installed to AS/NZ 3740
- As a waterproofing membrane under tile or other wearing surface systems to external balconies, rooftops & podium levels when installed to AS/NZ4654.2
- As an exposed waterproofing membrane to external applications subjected to light pedestrian traffic only



SAP No.	Size	Colour	Pkt Size	APN No
30840531	20L	White Liquid	1	9329431002782
30804460	20Kg	White Powder	1	9329431002768

PRIMESEAL RAPID

Bostik Primeseal Rapid is a one component rapid curing waterbased polyurethane, Class 3 waterproofing membrane system that meets the requirements of AS3740 by complying with AS/NZ 4858.

RECOMMENDED USES

- As a waterproofing membrane under tile to internal wet area shower, bathroom, kitchen, laundry & toilet areas when installed to AS/NZ 3740
- As a waterproofing membrane under tile or other wearing surfaces systems to external balconies, rooftops & podium levels when installed to AS/NZ 4654.2
- All applications to be covered by tile or other protective systems
- Suitable for concrete; cement rendered masonry; FC sheeting; water resistant plasterboard; and structural plywood.

SAP No.	Size	Colour	Pkt Size	APN No
30840503	15L	Blue	1	9310492260693



PRIMESEAL IMMERSED RAPID

Bostik Primeseal Immersed Rapid is a rapid setting two component water based, acrylic modified cement-based, Class 3 waterproofing membrane system that meets the requirements of AS3740 by complying with AS/NZ 4858.

RECOMMENDED USES

- As a waterproofing membrane under tile to internal wet area shower, bathroom, kitchen, laundry & toilet areas when installed to AS/NZ3740
- As a waterproofing membrane under tile or other wearing surface systemms to external balconies, rooftops & podium levels when installed to AS/NZ 4654.2
- As an exposed waterproofing membrane to external applications subjected to light pedestrian traffic only




MASTIK

Mastik is a high performance paste tile adhesive with excellent trowel feel and non-slip properties. Best adhesive in ready-to-use category.

RECOMMENDED USES

- Large wall tiles
- When high performance is required
- If strong tile hold is important
- When porosity of tile is not high
- Suitable for: walls only, concrete, render, fibre cement, plasterboard
- Approved waterproofing membranes (see recommendations)

SAP No.	Size	Colour	Pkt Size	APN No
30606232	4L	White	1	9329431000351
30606233	15L	White	1	9329431000337

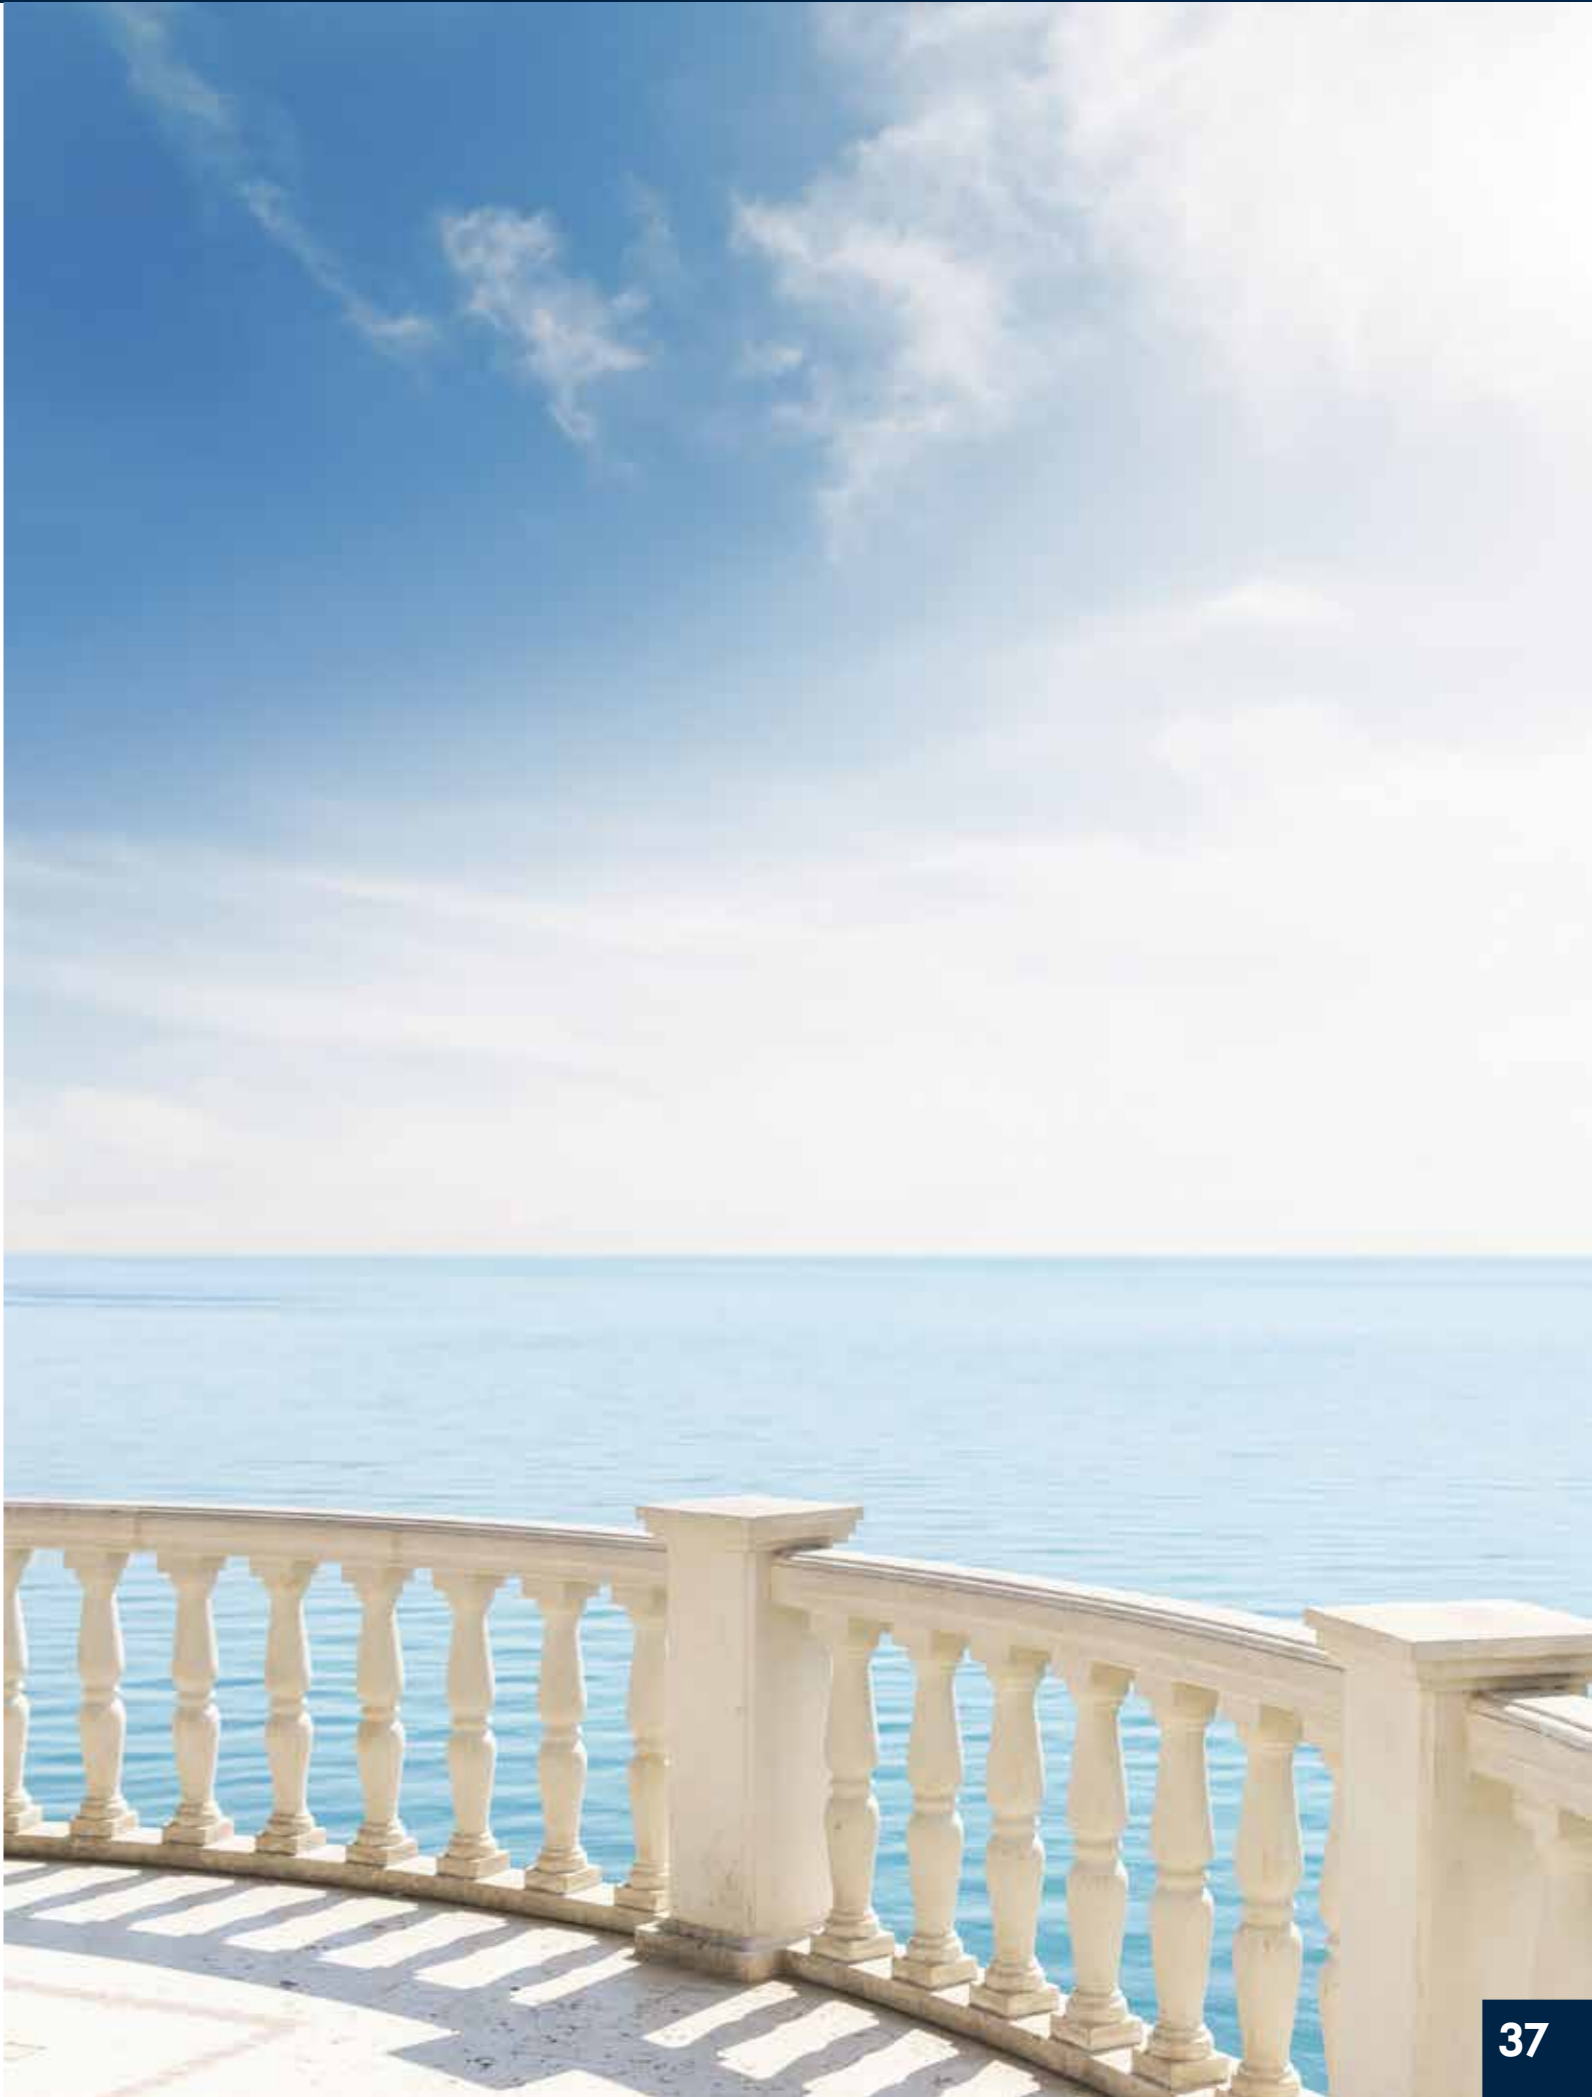

ASAFLEX

Asaflex is a two part adhesive with exceptional flexibility and superb bond. Designed for jobs where flexibility is critical. Suitable for commercial and high traffic tiling and can be used outdoors. Best choice for tiling onto timber or acoustic mat. Off white colour.

RECOMMENDED USES

- Whenever flexibility is vital
- Outdoors (balconies)
- Tile on timber
- Apartments
- Suitable substrates: concrete, render, fibre cement, plasterboard, acoustic mat, timber, wall and floor, high traffic, commercial and Dampfix Gold, Dampfix 3 & Dampfix 2

SAP No.	Size	Colour	Pkt Size	APN No
30804554	15L	White	1	9329431000856
30840351	15Kg NSW	White	1	9310492255842
30840352	15Kg VIC	White	1	9310492255842



EXCELFLEX

Excelflex is a rubber modified flexible tile adhesive. Well suited to general tiling where flexibility is desired. Suitable for domestic and general tiling

RECOMMENDED USES

- General tiling
- Domestic
- Where some flexibility is needed
- All moisture stable tile types. Suitable tiles include porcelain, ceramic, terracotta, terrazzo, glass and stone

SAP No.	Size	Colour	Pkt Size	APN No
30840542	20Kg VIC	Off White	1	9329431001693
30840532	20Kg WA	Off White	1	9329431001693
30840533	20Kg NSW	Off White	1	9329431001693



MEGAFIX

Megafix is a brilliant white adhesive perfect for use in bathrooms, with mosaics or when a very white adhesive is needed. Smooth, unsanded formulation means that grout joints do not need to be raked out before grouting.

RECOMMENDED USES

- Light coloured or translucent tiles
- Glass tiles
- Bathroom walls
- Whenever a bright white adhesive is needed
- All moisture stable tile types. Suitable tiles include porcelain, ceramic, terracotta, terrazzo, glass and stone

SAP No.	Size	Colour	Pkt Size	APN No
30840349	20Kg (VIC)	White	1	9329431001754
30840538	20KG (NSW)	White	1	9329431001754



MEGALASTIC

Megalastic a multi-purpose additive to upgrade the performance of cement based tile adhesives, grouts, screed and other similar systems. Improves adhesion, flexibility and water resistance but maintains workability, open time and pot life. Suitable for outdoors and full immersion once cured.

RECOMMENDED USES

- As Increasing adhesive or grout performance
- Immersed installations
- General purpose additive for cement based systems

SAP No.	Size	Colour	Pkt Size	APN No
30840184	5L	White	1	9329431000962
30840228	20L	White	1	9310492255897



ULTRA MASTIK

Ultra Mastik white tile adhesive with superior anti-slip; able to hold a 600x600mm tile. Smooth feel for easy trowelling and suitable for commercial and high traffic installations.

RECOMMENDED USES

- Concrete
- Render and early age (green) screed
- Fibre cement
- Plasterboard
- Dampfix Gold, Dampfix 3, Dampfix 2
- Wall and floor
- High traffic
- Suitable for immersion when 50% mix water is replaced with Megalastic
- Commercial

SAP No.	Size	Colour	Pkt Size	APN No
30840260	20kg VIC	White	1	9310492252780
30840346	20Kg NSW	White	1	9310492252780
30840252	20Kg WA	White	1	9310492252780



SUPERGLUE

Superglue is a light weight high performance tile adhesive. High bond strength, high flexibility and suitable for tile-on-tile. Suitable for commercial and high traffic tiling.

RECOMMENDED USES

- When one adhesive is required for most jobs
- When light weight is important
- When a high performance all rounder is needed
- Suitable substrates: Concrete, render and early age (green) screed
- Fibre cement, plasterboard, Dampfix Gold, Dampfix 3, Dampfix 2
- Wall & floor
- High traffic
- Total immersion
- Commercial

SAP No.	Size	Colour	Pkt Size	APN No
30840541	15Kg VIC	White	1	9329431002973



SUPERFIXALL

Superfixall is a white tile adhesive designed for use on rigid surfaces. Suitable for domestic tiling. Use with ASA Megalastic to upgrade flexibility and bond strength but maintaining long open time.

RECOMMENDED USES

- General tiling
- Ceramic tiles
- Domestic
- Suitable substrates: Concrete, screed and render , wall and floor

SAP No.	Size	Colour	Pkt Size	APN No
30840259	20Kg VIC	White	1	9310492255521
30840180	20Kg NSW	White	1	9310492255521
30840539	20Kg WA	White	1	9310492255521



MULTIFIX

Multifix is a white paste adhesive for fixing tiles to porous internal walls. Good general purpose ready-to-use adhesive.

RECOMMENDED USES

- Light coloured or translucent tiles.
- Walls
- Large jobs

SAP No.	Size	Colour	Pkt Size	APN No
30606961	5L	White	1	9310492261133
30606960	15L	White	1	9310492255040



CONFLEX

Conflex is a premium rubber-modified tile adhesive designed for demanding or high traffic applications. Excellent all-round adhesive suitable for commercial, high traffic and tile-on-tile installations.

RECOMMENDED USES

- General tiling
- When one adhesive is needed for most jobs
- Where a superior bond is needed
- High traffic
- Commercial or domestic
- Suitable for: Concrete, render and early age (green) screeds, fibre cement, plasterboard, Dampfix Gold, Dampfix 3, Dampfix 2
- Wall and floor
- High traffic
- Commercial

SAP No.	Size	Colour	Pkt Size	APN No
30840343	20Kg	Off White NSW	1	9310492255545
30840342	20Kg	Off White VIC	1	9310492255545
30840344	20kg	Off White WA	1	9310492255545



MAXIFLEX

Maxiflex is a great all-rounder tile adhesive. High yield, rubber modified, flexible adhesive designed for domestic and light commercial tiling. May be used on green concrete and screeds.

RECOMMENDED USES

- General tiling
- Domestic
- When one adhseive is needed for most tiling

SAP No.	Size	Colour	Pkt Size	APN No
30840545	20Kg WA	White	1	9310492254388
30840544	20Kg NSW	White	1	9310492254388
30840537	20Kg WA	White	1	9310492254388



FIXALL

Fixall is an off white adhesive designed for use on rigid surfaces. Suitable for domestic tiling. Use with ASA Megalastic to upgrade flexibility and bond strength.

RECOMMENDED USES

- General tiling
- Ceramic Tiles
- Domestic
- Concrete
- Screed and render
- Wall and floor

SAP No.	Size	Colour	Pkt Size	APN No
30840534	20Kg VIC	Off White	1	9329431001600
30840535	20kg NSW	Off White	1	9329431001600
30840536	20Kg WA	Off White	1	9329431001600



PRONTOFIX

Prontofix is a rapid setting white adhesive with long pot life, extended open time and excellent strength. Commercial and high traffic tiling can be done at normal pace but with a very fast return to service. Use with ASA Megalastic to upgrade flexibility and water resistance but maintain long working time.

RECOMMENDED USES

- When fast set is important
- Early grouting
- Early traffic
- Cool ambient conditions
- Commercial
- Concrete
- Early age (green) screed (1 day) and concrete (7 days)
- Wall and Floor
- High Traffic

SAP No.	Size	Colour	Pkt Size	APN No
30804456	20Kg	White	1	9329431001778



SANDED GROUT

Sanded Grout is a cement based grout used for grouting slate, quarry and treated terracotta tiles or where wider joints are required. Suitable for external installations and available in 5 colours.

RECOMMENDED USES

- External applications
- Wide joints
- Treated terracotta tiles
- Quarry tiles
- Slate

SAP No.	Size	Colour	Pkt Size	APN No
30840405	20Kg	QLD Grey Sanded	1	9310492258232
30840406	20Kg	Off White Sanded	1	9310492258249
30804434	20Kg	Grey Sanded	1	9310492258256
30804401	20Kg	Neutral Sanded	1	9310492258263
30840407	20Kg	Charcoal Sanded	1	9310492258270



DESIGNER GROUT

Designer Grout is an excellent commercial grade tile grout. Very easy clean-up and superb working properties means less mess, less waste and a better finish. Suitable for walls and floors for exterior and interior tiling. Available in a range of designer colours.

RECOMMENDED USES

- Walls and floors
- Internal and external applications
- Swimming pools (Use with 50% Megalastic)
- All tiling installations
- Suitable for all moisture stable tiles

SAP No.	Size	Colour	Pkt Size	APN No
30840384	2KG	White	8	9310492257686
30604392	4KG	White	4	9310492257679
30605631	20Kg	White	1	9310492257662
30604366	2Kg	Antique White	8	9310492257716
30604367	4Kg	Antique White	4	9310492257716
30840385	20Kg	Antique White	1	9310492257693
30604369	2Kg	Moleskin	8	9310492257747
30604370	4Kg	Moleskin	4	9310492257730
30605630	20Kg	Moleskin	1	9310492257723
30840387	2Kg	Tuscan	8	9310492257778
30840386	4Kg	Tuscan	4	9310492257761
30604718	20Kg	Tuscan	1	9310492257754
30604371	2Kg	Buff	8	9310492257839
30840389	4Kg	Buff	4	9310492257822
30605628	20Kg	Buff	1	9310492257815



DESIGNER GROUT

SAP No.	Size	Colour	Pkt Size	APN No
30840392	2Kg	Grey	8	9310492257921
30840391	4Kg	Grey	4	9310492257914
30840390	20Kg	Grey	1	9310492257907
30604381	2Kg	Delorian Grey	8	9310492257952
30604382	4Kg	Delorian Grey	4	9310492257945
30604380	20Kg	Delorian Grey	1	9310492257938
30840394	2Kg	Travertine	8	9310492257983
30840393	4Kg	Travertine	4	9310492257976
30605659	20Kg	Travertine	1	9310492257969
30604383	2Kg	Coffee	8	9310492258010
30604682	4Kg	Coffee	4	9310492258003
30840395	20Kg	Coffee	1	9310492257990
30840398	2Kg	Taupe	8	9310492258041
30840397	4Kg	Taupe	4	9310492258034
30840396	20Kg	Taupe	1	9310492258027
30840401	2Kg	Sandstone	8	9310492258102
30840400	4Kg	Sandstone	4	9310492258096
30605660	20Kg	Sandstone	1	9310492258089
30604385	2Kg	Pewter	8	9310492258195
30604386	4Kg	Pewter	4	9310492258171
30604384	20Kg	Pewter	1	9310492258171
30604388	2Kg	Charcoal	8	9310492258225
30604389	4Kg	Charcoal	4	9310492258218
30604387	20Kg	Charcoal	1	9310492258201
30604391	2Kg	White Smooth	8	9310492257655
30840383	4Kg	White Smooth	4	9310492257648
30840530	10Kg	White Smooth NSW	1	9329431001853
30605658	20Kg	White Smooth NSW	1	9329431001877
30840388	2Kg	Cream	8	9310492257808
30604503	4Kg	Cream	4	9310492257808
30840399	2Kg	Espresso	8	9310492257792
30604490	4Kg	Espresso	4	9310492258065
30840403	2Kg	Pergamon Beige	8	9310492258133
30840402	4Kg	Pergamon Beige	4	9310492258126
30840404	2Kg	Heritage Grey	8	9310492258164
30604489	4Kg	Heritage Grey	4	9310492258157
30604374	2Kg	Silver Gris	8	9310492257860
30604376	4Kg	Silver Gris	4	9310492257853
30604373	20Kg	Silver Gris	1	9310492257846
30604378	2Kg	QLD	8	9310492257891
30604379	4Kg	QLD	4	9310492257884
30604377	20Kg	QLD	1	9310492257877

UL-PRIMER

Bostik UL-Primer is a high performance one component primer for use on porous substrates. A polymer modified formula, designed for use with Bostik's Floor Levelling range.

RECOMMENDED USES

- Primer for use with Bostik's range of floor levelling products
- For porous substrates

SAP No.	Size	Colour	Pkt	APN No
30605423	5L	White	4	9310492200897



SPECIALIST PRIMER

Specialist Primer is a high performance aqueous primer for use on top of cured Dampfix PU (Polyurethane Waterproofing Membrane) and other specialist applications

RECOMMENDED USES

- May be used on the surface of Dampfix PU prior to covering with approved products

SAP No.	Size	Colour	Pkt Size	APN No
30840370	5L	Purple	1	9310492257426



MULTIPRIME

Multiprime is a general primer for porous surfaces that improves open time and bond of adhesive.

RECOMMENDED USES

- Used on all porous surfaces
- Improves bond
- Improved open-time
- Seals in minor dust
- Can improve strength of surface

SAP No.	Size	Colour	Pkt Size	APN No
30840175	5L	Opaque Pink	4	9329431000771
30840115	20L	Opaque Pink	1	9310492255903



N40 PRIMER

Bostik N40 Primer is a clear, non-staining solvent based primer/cleaner for promoting the adhesion of polyurethane sealants and waterproof membrane systems to non-porous substrates such as rigid plastics & most metals.

RECOMMENDED USES

- Cleans and primes surfaces in one action
- Preparation of glass for windscreen bonding

SAP No.	Size	Colour	Pkt Size	APN No
30804574	1L	Clear	12	9310492131900



N49 PRIMER

Bostik N49 Primer is designed for use with the Bostik polyurethane sealant range to ensure adhesion to porous substrates.

RECOMMENDED USES

- Sealants requiring the application of Bostik N49 Primer on porous substrates only are:
- Seal N Flex 1
 - Seal N Flex FC
 - PU Construction
 - Fireban One

SAP No.	Size	Colour	Pkt Size	APN No
30804493	1L	Clear	12	9310492131757
30840017	4L	Clear	4	9310492131788



HANDY WIPES

Bostik Handy Wipes are waterless hand towels that have a convenient scrub side for removing tough grime and one for gentle wiping away. These towels have been specially formulated to quickly and effectively remove sealant, tar, dirt, grease, oil, adhesive, paint and ink from tools and equipment.

RECOMMENDED USES


- At work – clean tools and equipment
- At home – kitchen, bathroom, BBQ, boat and 101 other uses

SAP No.	Size	Pkt Size	APN No
30840451	240 x 300mm - 70 Towels	6	9310492259963



APPLICATION PRO CARTRIDGE GUN

This heavy duty Pro Gun operates manually and holds 300ml cartridges

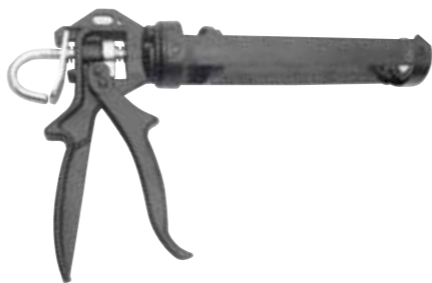

SAP No.	Size	Pkt Size	APN No
30840021	300ml Cartridge	1	9310492005409

APPLICATOR CARTRIDGE GUN (625SAE)

This manually operated gun is used for the 850gm cartridge



SAP No.	Size	Pkt Size	APN No
30840026	850gm Cartridge	1	9310492257174

APPLICATION BARREL GUN CLEAR 37CM

The Application Barrel Gun has a 37cm long aluminium barrel that is used for 600ml sausages. This gun is manually operated.



SAP No.	Size	Pkt Size	APN No
30803304	37cm - 600ml sausage	10	9310492443003

TRADE QUALITY GUN

This Applicator Trade Quality Gun is used for 300ml cartridge and is operated manually.



SAP No.	Size	Pkt Size	APN No
30840011	300ml Cartridge	1	9310492005355

APPLICATION END CAP SAUSAGE GUN

Application End Cap suitable for Application Barrel Gun Clear 37cm.



SAP No.	Size	Pkt Size	APN No
30840018	End Cap - 37cm Barrel Gun	1	9310492131795

TG-4 HOT GLUE GUN

Bostik TG-4 Glue Gun is a electrical operated applicator designed to dispense hot melt glue to bond most materials quickly and effeciently. If you use tapes, fasteners, staples or liquid adhesives, the Bostik TG-4Glue Gun will probably do it better, faster and neater.



SAP No.	Size	Pkt Size	APN No
30803287	Gun	4	9310492258652
30840024	Yellow 6303 Hot Melt Glue Stick 1Kg	1	9310492006253
30804592	Yellow 6303 Hot Melt Glue Sticks 15Kg	1	9310492259673
30840028	Clear 6330 Hot Melt Glue Sticks 5Kg	1	9310492000701

ULTRASET DX FLAT V NOTCH TROWEL

Ultraset DX Flat V Notch Trowel.



SAP No.	Size	Pkt Size	APN No
30840242	26mm x 6mm x 5mm	36	9310492258959

APPLICATION NOZZLE OPAQUE 39MM

Application nozzle for 39mm - 600ml sausage



SAP No.	Size	Pkt Size	APN No
30804584	39mm -600ml Sausage	10Pkt	9310492258904



Bostik Planograms

SIMPLIFY CATEGORY COMPLEXITIES

Merchandise products that follow a system that makes it easier to find products

ENHANCE THE SHOPPING EXPERIENCE

Make it quicker and easier for consumers to shop the category

MAKE IT EASY FOR THE STORE

Provide Bostik customers with a service to simplify the challenges of merchandising

Smart facts

MAXIMISE GMROI

Provide stores with a product mix that generates the best possible return

CONSISTENT STORE RANGING NATIONALLY

Duplicate successful planograms to aid in repeat shopping experiences

POSITION PRODUCTS AT HIGHEST RISK OF SALE

Ensure hero lines or common products are merchandised in their optimal sale-able position


ADHESIVES & SILICONES – TRADE RANGE 550MM BAY

3D Representation



ADHESIVES & SILICONES – TRADE RANGE 550MM BAY

Product Positioning Chart

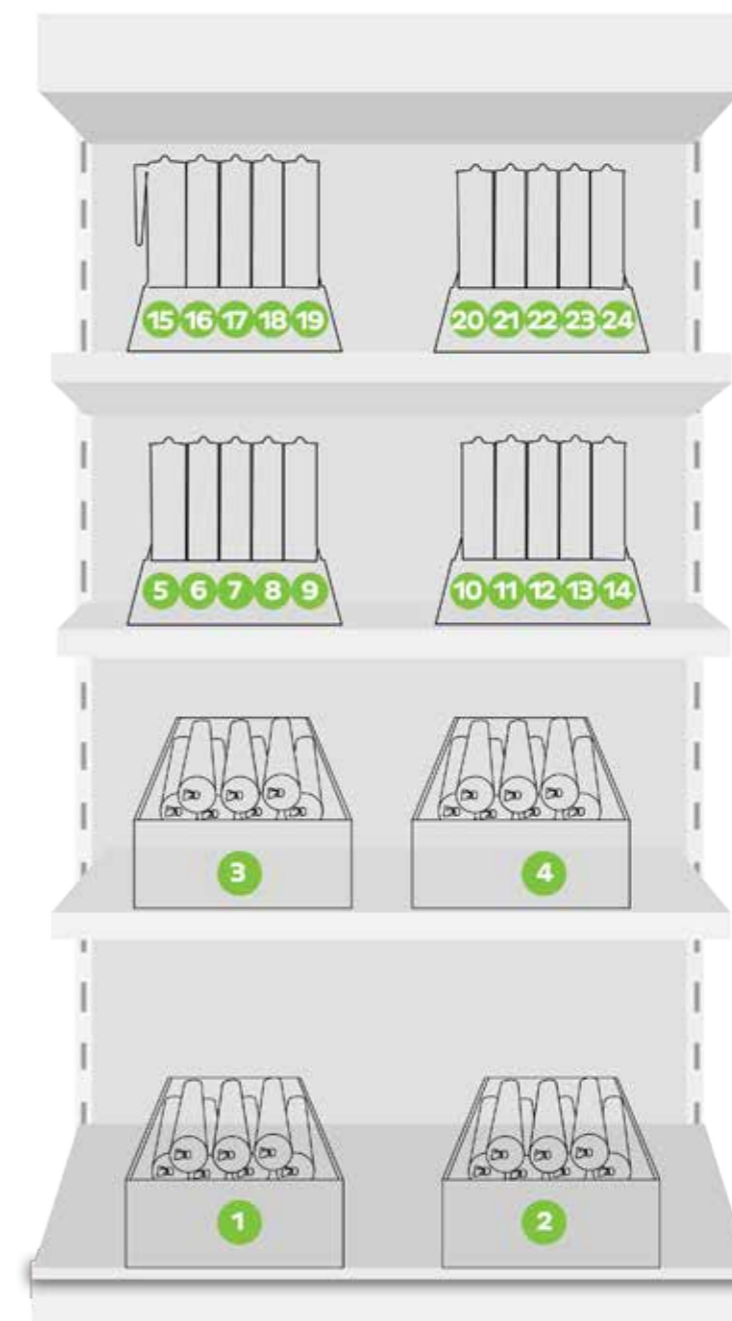


ADHESIVES & SILICONES – TRADE RANGE 900MM BAY

3D Representation



ADHESIVES & SILICONES – TRADE RANGE 900MM BAY

Product Positioning Chart

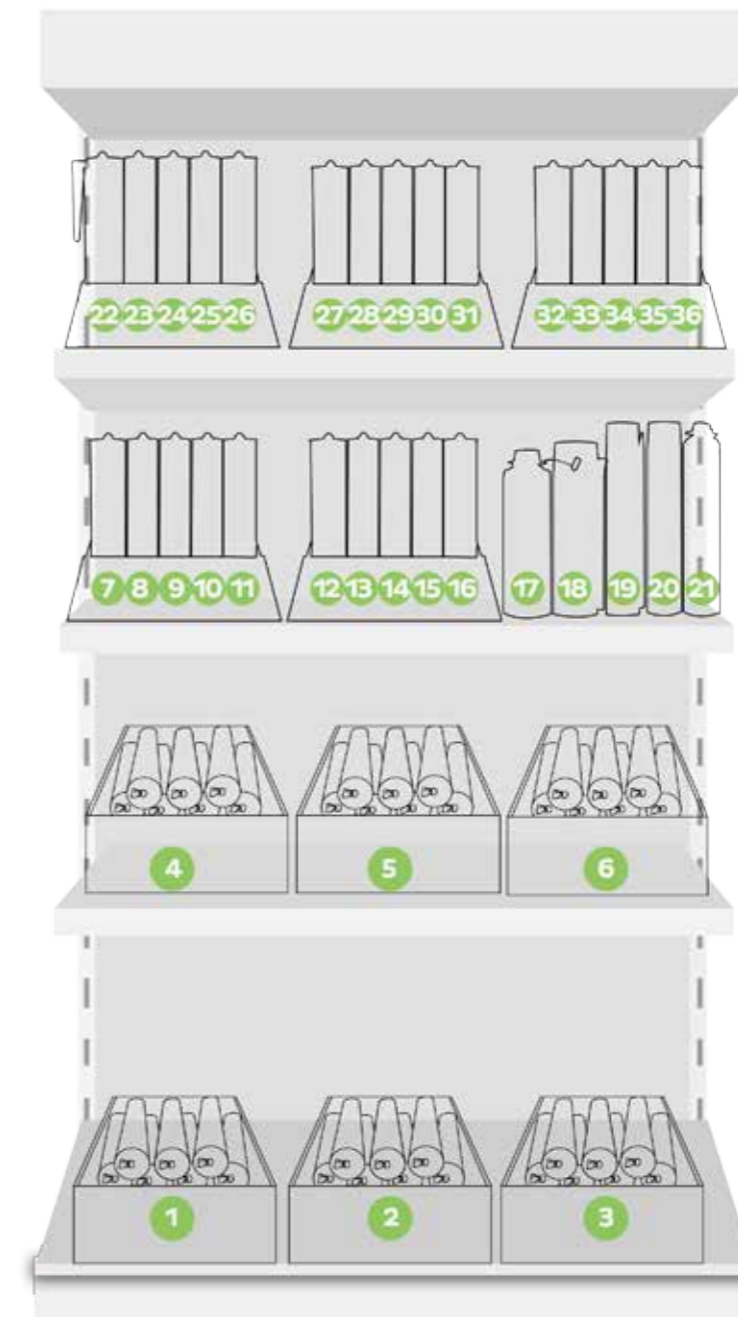

ADHESIVES & SILICONES – TRADE RANGE 550MM BAY

Category Schematic (Product Merchandising)

Bostik Adhesives & Silicones - Trade Range 550mm Bay										PRODUCT MERCHANDISING			
Shelf Position	Brand	New Item No.	Old Item No.	Item Description	Size	APN	Carton Qty	Facings (Left to Right)	Lay Overs (Stacking)	Facings Deep (Front to Back)			
SHELF 1													
1	Bostik	30840033	216267	SEAL N FLEX 1 WHITE	600mL	9310492131696	20	5	4	0			
2	Bostik	30803687	248681	SEAL N FLEX FC White	600mL	9310492020877	20	5	4	0			
SHELF 2													
3	Bostik	30840691		NO MORE NAILS	600mL	9310492260891	20	5	4	0			
4	Bostik	30840034	216275	SEAL N FLEX 1 GREY	600mL	9310492131702	20	5	4	0			
SHELF 3													
5, 6, 7	Bostik	30840353	371726	NO MORE NAILS	320g	9310492256283	15	3	0	4			
8 & 9	Bostik	30840354	371734	NO NAILS INSTANT	420g	9310492256290	12	2	0	4			
10	Bostik	30840363	373664	MULTI-PURPOSE SIL SEAL TRANS	300g	9310492257181	12	1	0	4			
11	Bostik	30840127	271071	KITCHEN & BATHROOM SIL NC TRANS	300mL	9310492209630	20	1	0	4			
12	Bostik	30818135	271292	KITCHEN & BATHROOM SIL AC TRANS	300mL	9310492996905	20	1	0	4			
13	Bostik	30804571	241563	KITCHEN & BATHROOM SIL AC WHITE	300mL	9310492002408	20	1	0	4			
14	Bostik	30605381	380245	GAP SEAL	450g	9310492259833	20	1	0	4			
15 & 16	Bostik	30601957	371327	XTREME FIX WHITE	290mL	9310492256108	12	2	0	4			
17 & 18	Bostik	30821271	373869	XTREME SEAL & FIX CLEAR	290mL	9310492257419	12	2	0	4			
19	Bostik	30601956	371335	XTREME SEAL & FIX WHITE	290mL	9310492256115	12	1	0	4			
20	Bostik	30800828	241008	R&G SIL PREMIUM TRANS	300g	9310492002552	20	1	0	4			
21	Bostik	30840060	241016	R&G SIL PREMIUM GREY	300g	9310492012575	20	1	0	4			
22	Bostik	30840059	240990	R&G SIL PREMIUM WHITE	300g	9310492012568	20	1	0	4			
23	Bostik	30840067	246220	SEAL N FLEX 1 WHITE	300mL	9301492220888	20	1	0	4			
24	Bostik	30840076	248703	SEAL N FLEX FC WHITE	300mL	9310492020846	20	1	0	4			
Equipment Checklist:				Key									
The following items are required to build this planogram													
4 x Bostik Cartridge Display Boxes				Sausage Display Box									
4 x Bostik Cartridge Display Boxes				Cartridges Display Box									

ADHESIVES & SILICONES – TRADE RANGE 900MM BAY

Category Schematic (Product Merchandising)

Bostik Adhesives & Silicones - Trade Range 900mm Bay										PRODUCT MERCHANDISING			
Shelf Position	Brand	New Item No.	Old Item No.	Item Description	Size	APN	Carton Qty	Facings (Left to Right)	Lay Overs (Stacking)	Facings Deep (Front to Back)			
SHELF 1													
1	Bostik	30840033	216267	SEAL N FLEX 1 WHITE	600mL	9310492131696	20	5	4	0			
2	Bostik	30840072	247227	SEAL N FLEX FC GREY	600mL	9310492020822	20	5	4	0			
3	Bostik	30803687	248681	SEAL N FLEX FC WHITE	600mL	9310492020877	20	5	4	0			
SHELF 2													
4	Bostik	30840691		NO MORE NAILS	600mL	9310492260891	20	5	4	0			
5	Bostik	30840034	216275	SEAL N FLEX 1 GREY	600mL	9310492131702	20	5	4	0			
6	Bostik	30840044	224200	FIREBAN 1 LIMESTONE	600mL	9310492131887	20	5	4	0			
SHELF 3													
7, 8, 9	Bostik	30840353	371726	NO MORE NAILS	320g	9310492256283	15	3	0	4			
10 & 11	Bostik	30840354	371734	NO NAILS INSTANT	420g	9310492256290	12	2	0	4			
12	Bostik	30840363	373664	MULTI-PURPOSE SIL SEAL TRANS	300g	9310492257181	12	1	0	4			
13	Bostik	30840127	271071	KITCHEN & BATHROOM SIL NC TRANS	300mL	9310492209630	20	1	0	4			
14	Bostik	30818135	271292	KITCHEN & BATHROOM SIL AC TRANS	300mL	9310492996905	20	1	0	4			
15	Bostik	30804571	241563	KITCHEN & BATHROOM SIL AC WHITE	300mL	9310492002408	20	1	0	4			
16	Bostik	30605381	380245	GAP SEAL	450g	9310492259833	20	1	0	4			
17	Bostik	30840487	382280	EXPANDA GUN AND FOAM CLEANER	500mL	9310492260358	12	1	0	6			
18	Bostik	30804545	267414	EXPANDA FOAM	350g	93104920005850	12	1	0	6			
19	Bostik	30840126	267864	EXPANDA FOAM	580g	93104920005867	12	1	0	6			
20	Bostik	30840484	382256	FIRE RATED EXPANDA FOAM	750mL	9310492260327	12	1	0	6			
21	Bostik	30840485	382264	FIRE RATED EXPANDA GUN GRADE	750mL	9310492260334	12	1	0	6			
SHELF 4													
22 & 23	Bostik	30601957	371327	XTREME FIX WHITE	290mL	9310492256108	12	2	0	4			
24 & 25	Bostik	30821271	373869	XTREME SEAL & FIX CLEAR	290mL	9310492257419	12	2	0	4			
26	Bostik	30601956	371335	XTREME SEAL & FIX WHITE	290mL	9310492256115	12	1	0	4			
27	Bostik	30800828	241008	R&G SIL PREMIUM TRANS	300g	9310492002552	20	1	0	4			
28	Bostik	30840060	241016	R&G SIL PREMIUM GREY	300g	9310492012575	20	1	0	4			
29	Bostik	30840059	240990	R&G SIL PREMIUM WHITE	300g	9310492012568	20	1	0	4			
30	Bostik	30840235	329827	R&G WOODLAND GREY	300g	9301492996882	6	1	0	4			
31	Bostik	30840335	366862	R&G CLASSIC CREAM	300g	9310492996875	6	1	0	4			
32	Bostik	30803243	246158	SEAL N FLEX 1 GREY	300mL	9310492000831	20	1	0	4			
33	Bostik	30840067	246220	SEAL N FLEX 1 WHITE	300mL	9310492220888	20	1	0	4			
34	Bostik	30840073	247235	SEAL N FLEX FC GREY	300mL	9310492131924	20	1	0	4			
35	Bostik	30840076	248703	SEAL N FLEX FC WHITE	300mL	9310492020846	20	1	0	4			
36	Bostik	30840066	245410	FIRECAULK WHITE	300mL	9310492132105	20	1	0	4			
Equipment Checklist:													
The following items are required to build this planogram													
6 x Bostik Cartridge Display Boxes										Sausage Display Box			
5 x Bostik Cartridge Display Boxes										Cartridge Display Box			


BOSTIK FLOORING RANGE – 900MM BAY

3D Representation



BOSTIK FLOORING RANGE – 900MM BAY

Product Positioning Chart

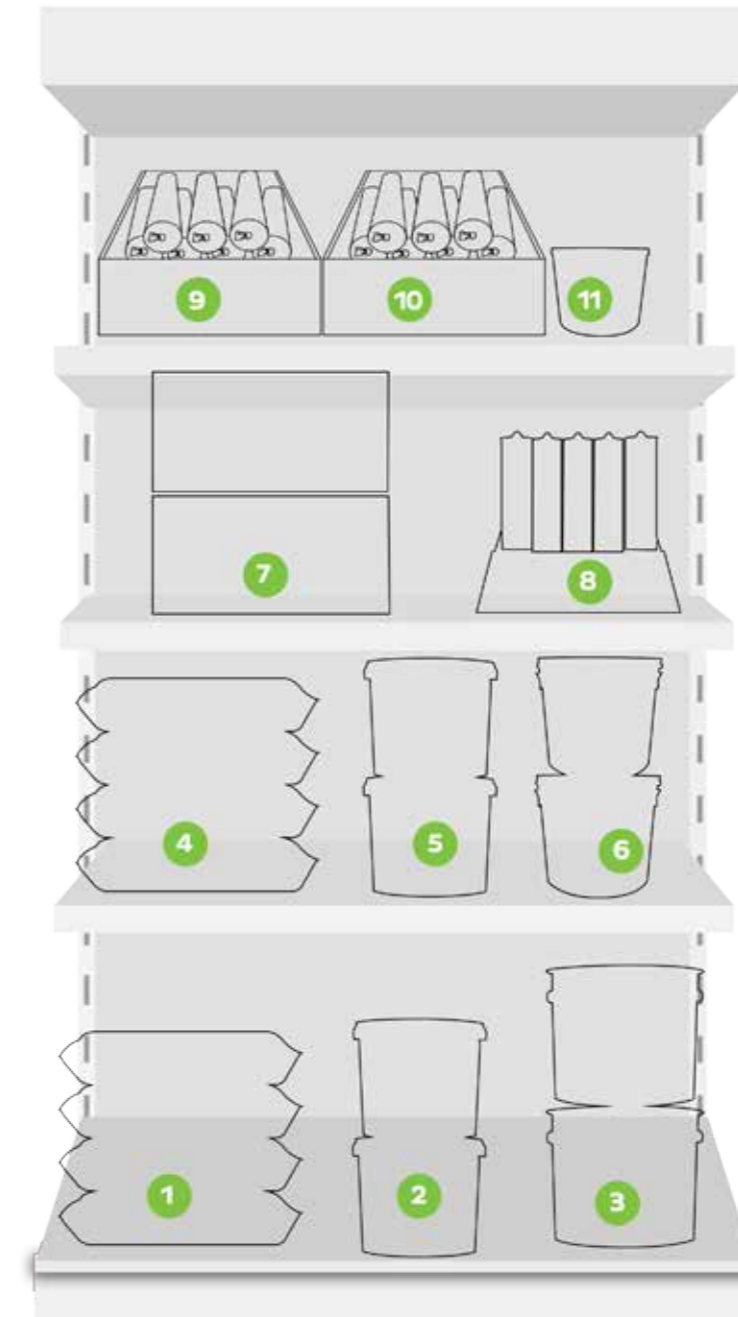


BOSTIK FLOORING RANGE – 1,200MM BAY

3D Representation



BOSTIK FLOORING RANGE – 1,200MM BAY

Product Positioning Chart

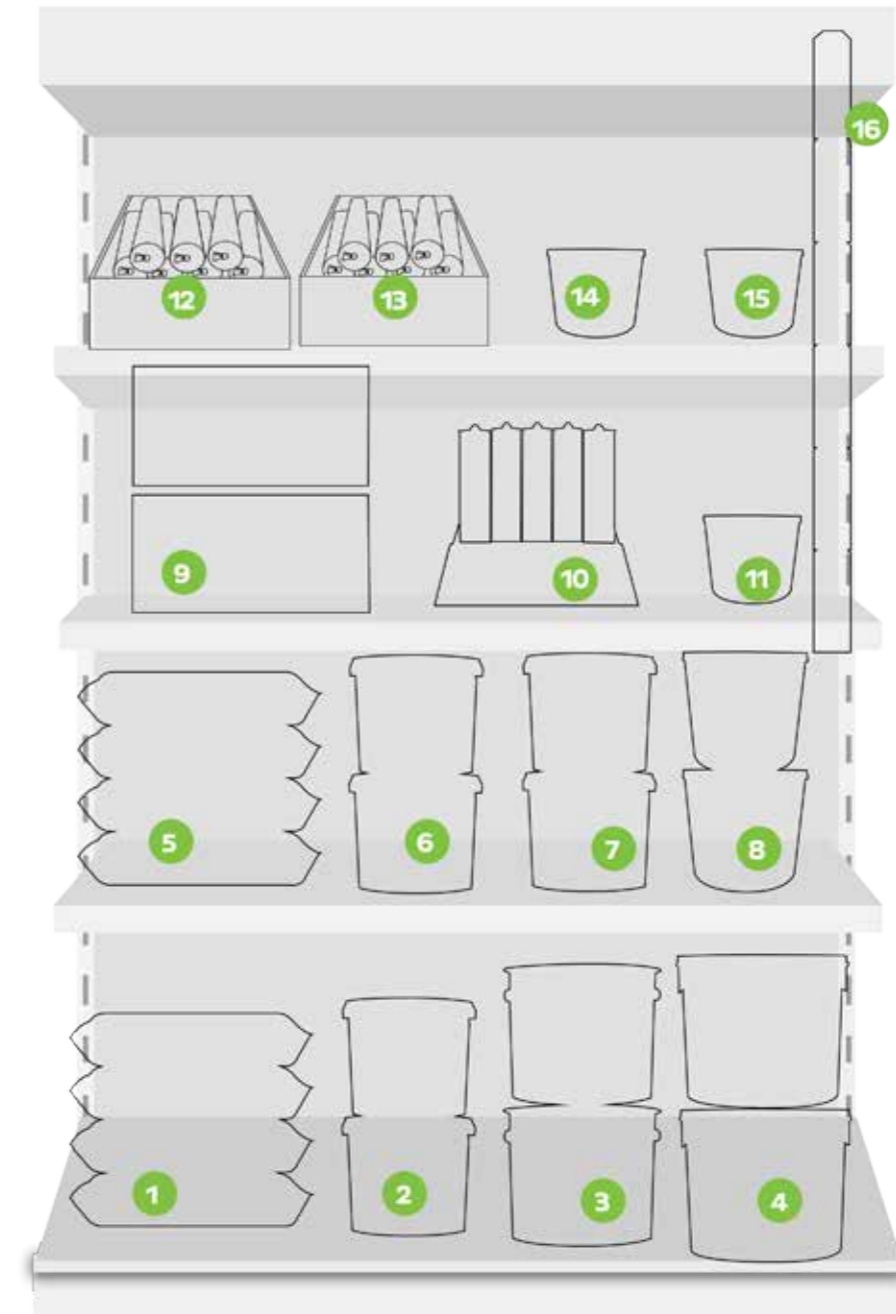

BOSTIK FLOORING RANGE – 900MM BAY

Category Schematic (Product Merchandising)

CATEGORY SCHEMATIC										
Bostik Flooring Range 900mm Bay										
								PRODUCT MERCHANDISING		
Shelf Position	Brand	New Item No.	Old Item No.	Item Description	Size	APN	Carton Qty	Facings (Left to Right)	Lay Overs (Stacking)	Facings Deep (Front to Back)
SHELF 1										
1	Bostik	30840423	377708	UL100 FLOOR LEVELLER 20KG	20kg	9310492258744	1	1	4	1
2	Bostik	30608841		GREENFORCE	15.1L	747224700018	1	1	2	1
3	Bostik	30604590	376752	ULTRASET SF	16kg	9310492258324	1	1	2	1
SHELF 2										
4	Bostik	30840422	377694	UL50 FLOOR LEVELLER 20KG	20kg	9310492258737	1	1	4	1
5	Bostik	30608843		ULTRA-SET SINGLESTEP2	15.1L	747224700018	1	1	2	1
6	Bostik	30814374		LAYBOND CARPET 15KG	15kg	9310492260969	1	1	2	1
SHELF 3										
7	Bostik	3080434	378860	ULTRASEAL VAPOUR BARRIER KIT	4L	9310492258805	1	1	2	2
8	BOSTIK	30840208	311960	ULTRASET SF BROWN CG	300mL	9310492250236	20	5	0	4
SHELF 4										
9	Bostik	30840417	377155	ULTRASET HP SSG	600mL	9310492258386	20	5	4	0
10	Bostik	30840110	262463	ULTRASET SF BROWN SSG	600mL	9310492131979	20	5	4	0
11	Bostik	30814555		LAYBOND CARPET 5KG	5kg	9310492260952	1	1	0	1
Equipment Checklist:										
The following items are required to build this planogram										
1 x Bostik Cartridge Display Boxes									Cartridge Display Box	
2 x Bostik Cartridge Display Boxes									Sausage Display Box	

BOSTIK FLOORING RANGE – 1,200MM BAY

Category Schematic (Product Merchandising)

CATEGORY SCHEMATIC										
Bostik Flooring Range 1,200mm Bay										
								PRODUCT MERCHANDISING		
Shelf Position	Brand	New Item No.	Old Item No.	Item Description	Size	APN	Carton Qty	Facings (Left to Right)	Lay Overs (Stacking)	Facings Deep (Front to Back)
SHELF 1										
1	Bostik	30840423	377708	UL100 FLOOR LEVELLER	20kg	9310492258744	1	1	4	1
2	Bostik	30608841		GREENFORCE	15.1L	747224700018	1	1	2	1
3	Bostik	30604590	376752	ULTRASET SF	16kg	9310492258324	1	1	2	1
4	Bostik	30814547		LAYBOND VINYL	15kg	9310492260983	1	1	2	1
SHELF 2										
5	Bostik	30840422	377694	UL50 FLOOR LEVELLER	20kg	9310492258737	1	1	4	1
6	Bostik	30608843		ULTRASET SINGLESTEP2	15.1L	747224700018	1	1	2	1
7	Bostik	30840416	377147	ULTRASET HP	16kg	9310492258379	1	1	2	1
8	Bostik	30814374		LAYBOND CARPET	15kg	9310492261034	1	1	2	1
SHELF 3										
9	Bostik	30840434	378860	ULTRASEAL VAPOUR BARRIER KIT	4L	9310492258805	1	1	2	2
10	Bostik	30840208	311960	ULTRASET SF BROWN CG	300mL	9310492250236	20	5	0	4
11	Bostik	30814555		LAYBOND CARPET	5Kg	9310492260952	1	1	0	1
SHELF 4										
12	Bostik	30840417	377155	ULTRASET HP SSG	600mL	9310492258386	20	5	4	0
13	Bostik	30840110	262463	ULTRASET SF BROWN SSG	600mL	9310492131979	20	5	4	0
14	Bostik	30814549		LAYBOND PRESSURE SENSITIVE	5KG	9310492261010	1	1	0	1
15	Bostik	30814554		LAYBOND VINYL	5kg	9310492260976	1	1	0	1
HANG SELL										
16	Bostik	30840372	374059	BOSTIK SIMPLE FIX	300mL	747224351807	6	0	6	0
w										
Equipment Checklist:				Key						
The following items are required to build this planogram										
1 x Bostik Cartridge Display Boxes						Cartridge Display Box				
2 x Bostik Sausage Display Boxes						Sausage Display Box				


BOSTIK TILING RANGE – 900MM BAY

3D Representation



BOSTIK TILING RANGE – 900MM BAY

Product Positioning Chart

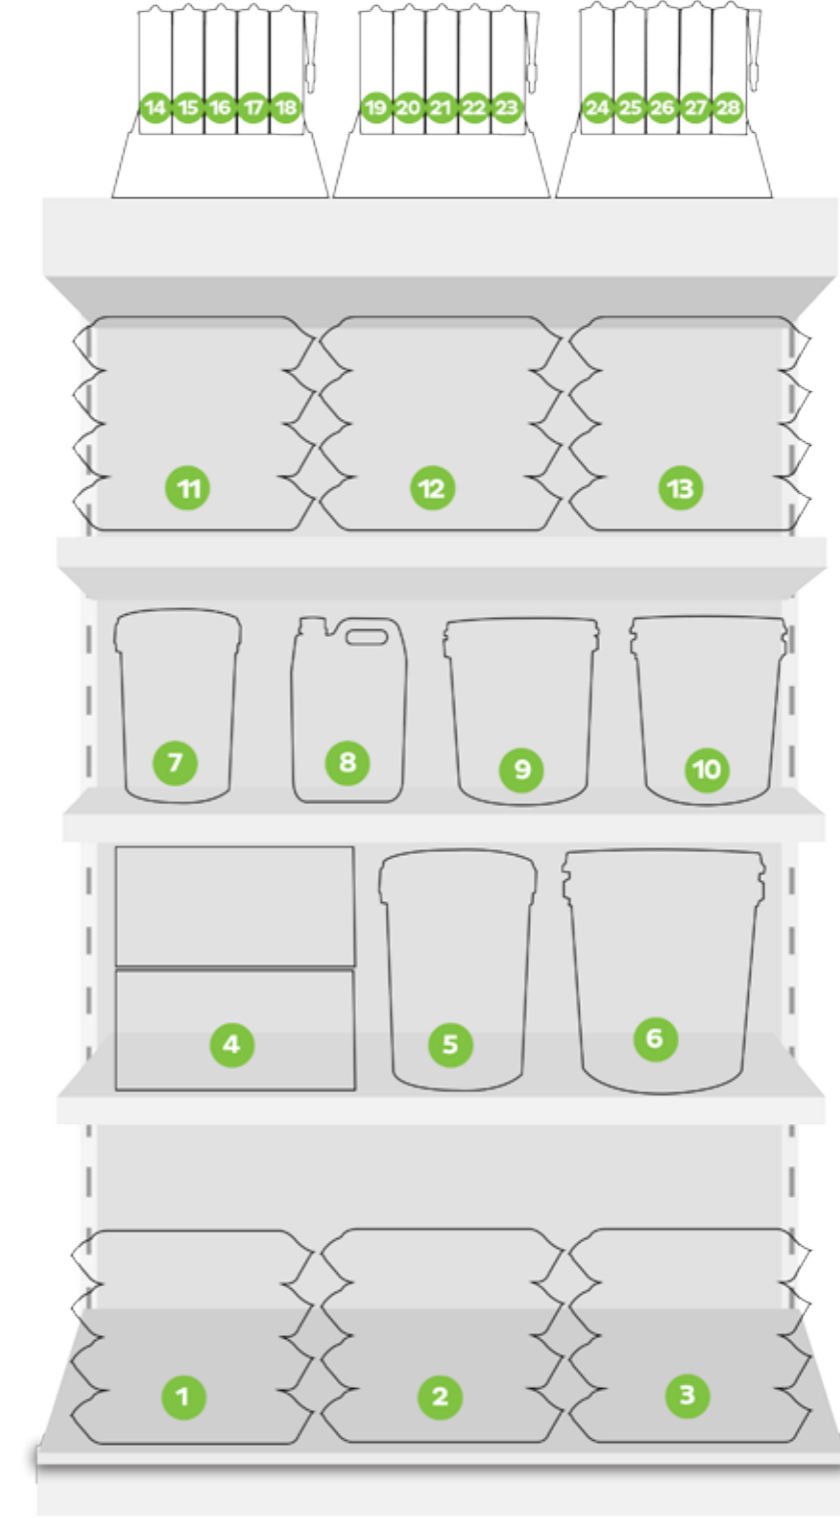


BOSTIK TILING RANGE – 1,200MM BAY

3D Representation



BOSTIK TILING RANGE – 1,200MM BAY

Product Positioning Chart

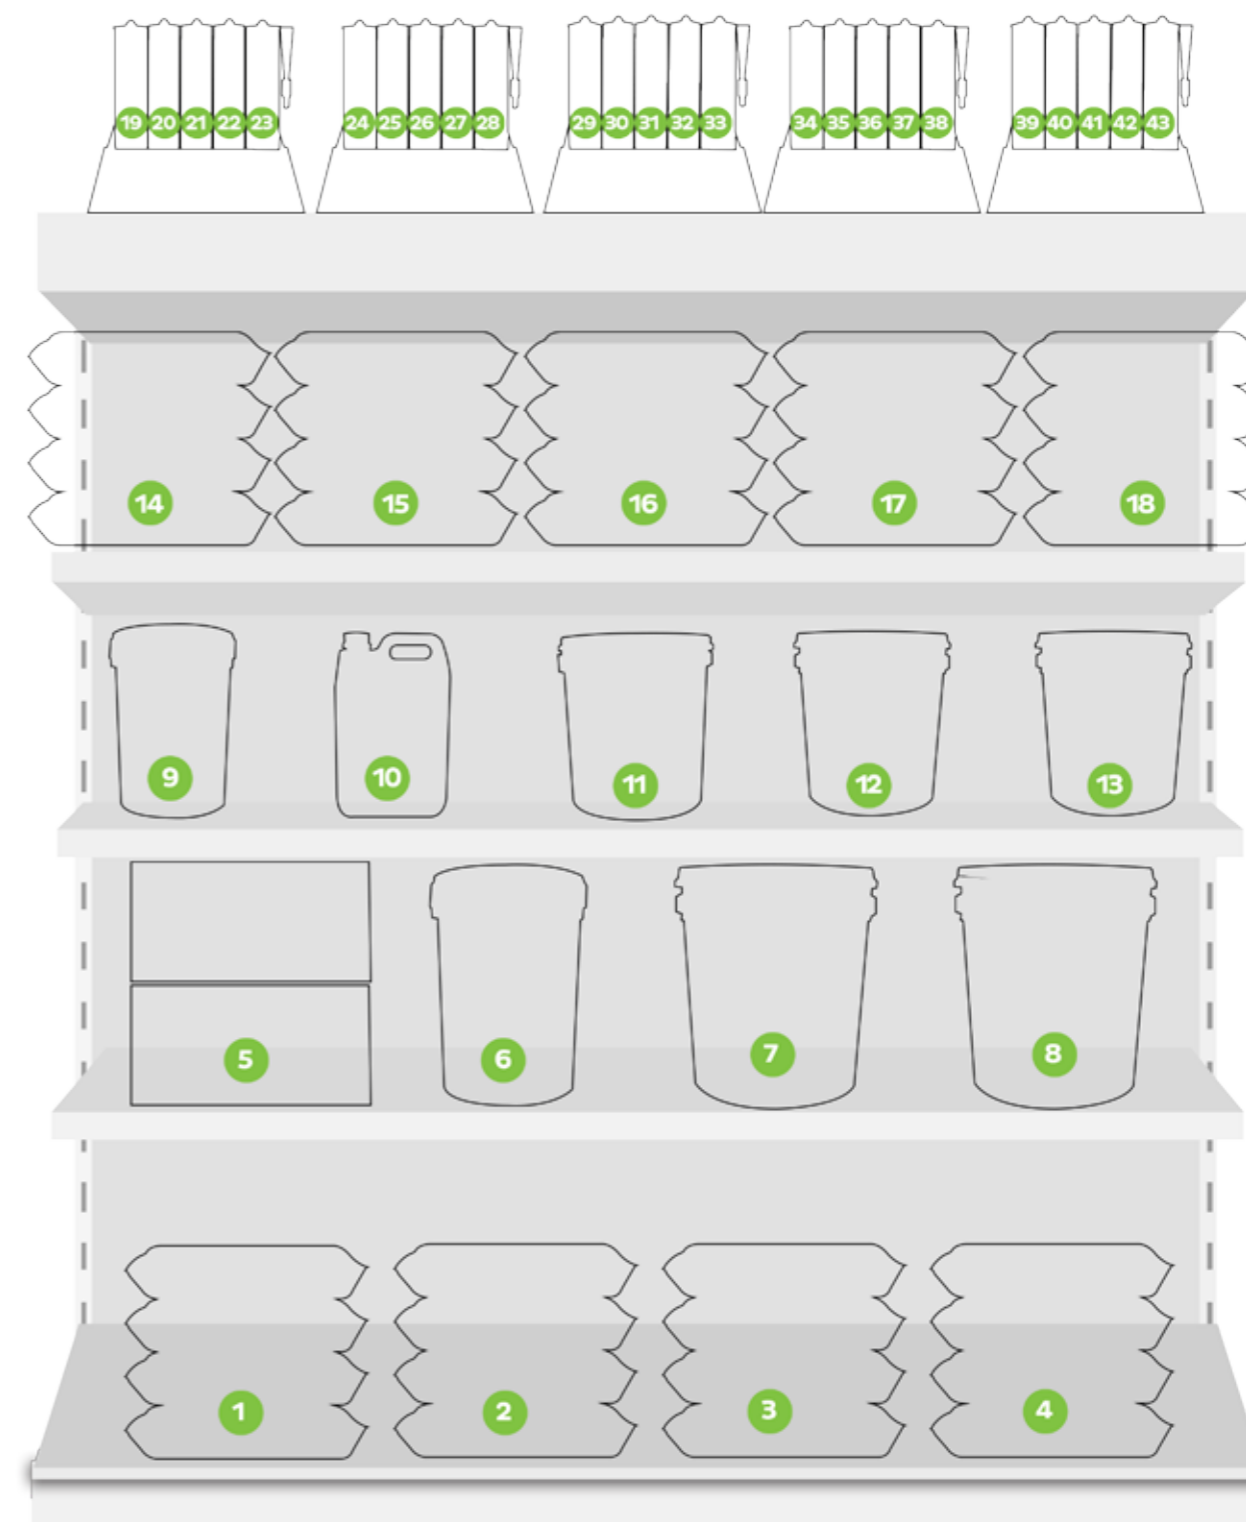

BOSTIK TILING RANGE – 900MM BAY

Category Schematic (Product Merchandising)

CATEGORY SCHEMATIC Bostik Tiling Range 900mm Bay							PRODUCT MERCHANDISING			
Shelf Position	Brand	New Item No.	Old Item No.	Item Description	Size	APN	Carton Qty	Facings (Left to Right)	Lay Overs (Stacking)	Facings Deep (Front to Back)
SHELF 1										
1	Bostik	30605691	378534	UL-SCREED	20kg	9310492258775	1	1	4	0
2	ASA	30840542	404128	EXCELFLEX VIC	20kg	9329431001693	1	1	4	0
3	ASA	30605658	400505	WHITE SMOOTH GROUT NSW	20kg	9329431001877	1	1	4	0
SHELF 2										
4	Bostik	30840500		MOISTURE SEAL KIT	10L	9310492260662	1	1	2	0
5	ASA	30840115		MULTIPRIME	20L	9310492255903	1	1	0	0
6	ASA	30800489	400777	DAMPEIX GOLD	15L	9329431002980	1	1	0	0
SHELF 3										
7	ASA	30840184	302473	MEGALASTIC	5L	9329431000962	4	1	0	2
8	ASA	30840175	299480	MULTIPRIME	5L	9329431000771	4	1	0	2
9	ASA	30606961	384895	MULTIFIX	5L	9310492261133	1	1	0	2
10	ASA	30804399	404330	DAMPEIX GOLD	4L	9329431002904	4	1	0	2
SHELF 4										
11	ASA	30604391	375608	DESIGNER GROUT 100 WHITE GROUT	2kg	9310492257686	8	1	4	0
12	ASA	30840392	375853	DESIGNER GROUT 430 GREY GROUT	2kg	9310492257921	8	1	4	0
13	ASA	30840388	375721	DESIGNER GROUT 240 CREAM GROUT	2kg	9310492257808	8	1	4	0
SHELF 5										
14 - 15	Bostik	30840635		PRIMESIL DESIGNER SILICONE 100 WHITE	300mL	9310492261362	6	5	0	4
16	Bostik	30840633		PRIMESIL DESIGNER SILICONE 210 ANTIQUE WHITE	300mL	9310492261348	6	2	0	4
17	Bostik	30840640		PRIMESIL DESIGNER SILICONE 220 MOLESKIN	300mL	9310492261416	6	2	0	4
18	Bostik	30840641		PRIMESIL DESIGNER SILICONE 230 TUSCAN	300mL	9310492261423	6	1	0	4
19	Bostik	30840634		PRIMESIL DESIGNER SILICONE 410 SILVER GRIS	300mL	9310492261355	6	1	0	4
20	Bostik	30840636		PRIMESIL DESIGNER SILICONE 420 QLD	300mL	9310492261379	6	1	0	4
21	Bostik	30840643		PRIMESIL DESIGNER SILICONE 430 GREY	300mL	9310492261447	6	1	0	4
22	Bostik	30840637		PRIMESIL DESIGNER SILICONE 440 DELORIAN GREY	300mL	9310492261386	6	1	0	4
23	Bostik	30840642		PRIMESIL DESIGNER SILICONE 510 TAVERTIME	300mL	9310492261430	6	1	0	4
24	Bostik	30840645		PRIMESIL DESIGNER SILICONE 540 ESPRESSO	300mL	9310492261461	6	1	0	4
25	Bostik	30840644		PRIMESIL DESIGNER SILICONE 610 SANDSTONE	300mL	9310492261454	6	1	0	4
26	Bostik	30840646		PRIMESIL DESIGNER SILICONE 710 HERTITAGE GREY	300mL	9310492261478	6	1	0	4
27	Bostik	30840638		PRIMESIL DESIGNER SILICONE 810 PEWTER	300mL	9310492261393	6	1	0	4
28	Bostik	30840639		PRIMESIL DESIGNER SILICONE 820 CHARCOAL	300mL	9310492261409	6	1	0	4
Equipment Checklist:										
The following items are required to build this planogram					Key					
3 x Bostik Cartridge Display Boxes							Cartridge Display Box			

BOSTIK TILING RANGE – 1,200MM BAY

Category Schematic (Product Merchandising)

CATEGORY SCHEMATIC Bostik Tiling Range 1,200mm Bay							PRODUCT MERCHANDISING			
Shelf Position	Brand	New Item No.	Old Item No.	Item Description	Size	APN	Carton Qty	Facings (Left to Right)	Lay Overs (Stacking)	Facings Deep (Front to Back)
SHELF 1										
1	Bostik	30605691	378534	UL-SCREED	20kg	9310492258775	1	1	4	0
2	ASA	30840542	404128	EXCELFLEX VIC	20kg	9329431001693	1	1	4	0
3	ASA	30840343	369482	CONFLEX VIC	20kg	9310492255545	1	1	4	0
4	ASA	30605658	400505	WHITE SMOOTH GROUT NSW	20kg	9329431001877	1	1	4	0
SHELF 2										
5	Bostik	30840500		MOISTURE SEAL KIT	10L	9310492260662	1	1	2	0
6	ASA	30840115		MULTIPRIME	20L	9310492255903	1	1	0	0
7	ASA	30800489	400777	DAMPEIX GOLD	15L	9329431002980	1	1	0	0
8	ASA	30606233	267031	MASTIK YELLOW PAI	22kg	9329431000337	1	1	0	0
SHELF 3										
9	ASA	30840184	302473	MEGALASTIC	5L	9329431000962	4	1	0	2
10	ASA	30840175	299480	MULTIPRIME	5L	9329431000771	4	1	0	2
11	ASA	30606961	384895	MULTIFIX	5L	9310492261133	1	1	0	2
12	ASA	30804399	404330	DAMPEIX GOLD	4L	9329431002904	4	1	0	2
13	ASA	30606232	269042	MASTIK YELLOW PAI	4L	9329431000351	1	1	0	2
SHELF 4										
13	ASA	30604391	375608	DESIGNER GROUT 100 WHITE GROUT	2kg	9310492257686	8	1	4	0
14	ASA	30840392	375853	DESIGNER GROUT 430 GREY GROUT	2kg	9310492257921	8	1	4	0
15	ASA	30840401	376051	DESIGNER GROUT 610 SANDSTONE GROUT	2kg	9310492258102	8	1	4	0
16	ASA	30840388	375721	DESIGNER GROUT 240 CREAM GROUT	2kg	9310492257808	8	1	4	0
17	ASA	30840399	376027	DESIGNER GROUT 540 ESPRESSO GROUT	2kg	9310492258072	8	1	4	0
SHELF 5										
18 - 22	Bostik	30840635		PRIMESIL DESIGNER SILICONE 100 WHITE	300mL	9310492261362	6	5	0	4
23 & 24	Bostik	30840633		PRIMESIL DESIGNER SILICONE 210 ANTIQUE WHITE	300mL	9310492261348	6	2	0	4
25 & 26	Bostik	30840640		PRIMESIL DESIGNER SILICONE 220 MOLESKIN	300mL	9310492261416	6	2	0	4
27	Bostik	30840641		PRIMESIL DESIGNER SILICONE 230 TUSCAN	300mL	9310492261423	6	1	0	4
28	Bostik	30840634		PRIMESIL DESIGNER SILICONE 410 SILVER GRIS	300mL	9310492261355	6	1	0	4
29	Bostik	30840636		PRIMESIL DESIGNER SILICONE 420 QLD	300mL	9310492261379	6	1	0	4
30	Bostik	30840643		PRIMESIL DESIGNER SILICONE 430 GREY	300mL	9310492261447	6	1	0	4
31	Bostik	30840637		PRIMESIL DESIGNER SILICONE 440 DELORIAN GREY	300mL	9310492261386	6	1	0	4
32	Bostik	30840642		PRIMESIL DESIGNER SILICONE 510 TAVERTIME	300mL	9310492261430	6	1	0	4
33	Bostik	30840645		PRIMESIL DESIGNER SILICONE 540 ESPRESSO	300mL	9310492261461	6	1	0	4
34	Bostik	30840644		PRIMESIL DESIGNER SILICONE 610 SANDSTONE	300mL	9310492261454	6	1	0	4
35	Bostik	30840646		PRIMESIL DESIGNER SILICONE 710 HERTITAGE GREY	300mL	9310492261478	6	1	0	4
36	Bostik	30840638		PRIMESIL DESIGNER SILICONE 810 PEWTER	300mL	9310492261393	6	1	0	4
37	Bostik	30840639		PRIMESIL DESIGNER SILICONE 820 CHARCOAL	300mL	9310492261409	6	1	0	4
Equipment Checklist:										
The following items are required to build this planogram					Key					
4 x Bostik Cartridge Display Boxes							Cartridge Display Box			



**Smart help:
Contact your
Bostik Representative**

BOSTIK Australia
51 - 71 High Street
Thomastown, VIC 3074

Phone: 1300 364 710
Fax: 1300 725 852

www.bostik.com
Edition: 3- 2017